


CS7PV22

S+S CS7 Auxiliary Contact with 2NO Contacts and 2NC Contact
Top Mount



CONTACTORS

sprecher+schuh

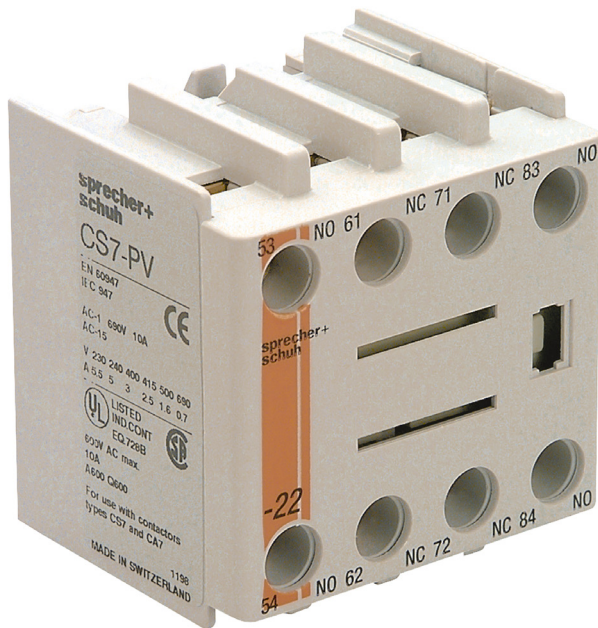

Component type	Auxiliary contact block
Range	CS7
Model	N/A
Product status	Existing

The Sprecher + Schuh CS7 Industrial Control Relays share the same modern design as the CA7 contactor range. Compact and built for heavy-duty industrial control applications where reliability and versatility are essential and available as either standard, master and bifurcated models.

ELECTRICAL

Number of contacts as normally open contact	2
Number of contacts as normally closed contact	2
Rated insulation voltage U_i	690 V
Rated operation current I_e at AC-15, 24 V	6 A
Rated operation current I_e at AC-15, 120 V	6 A
Rated operation current I_e at AC-15, 240 V	5 A
Rated operation current I_e at AC-15, 400 V	3 A
Rated operation current I_e at DC-12, 24 V	12 A
Rated operation current I_e at DC-12, 110 V	3.5 A
Rated operation current I_e at DC-12, 220 V	0.55 A
Rated operation current I_e at DC-13, 24 V	5 A
Rated operation current I_e at DC-13, 110 V	1.2 A
Rated operation current I_e at DC-13, 220 V	0.6 A
Min. contact rating current	5 mA
Min. contact rating voltage	17 V
Rated operation current I_e at AC-15, 230 V	5.5 A

CONSTRUCTION

Mounting method	Top mounting
Model	Top mounting