

D7X01

Sprecher and Schuh D7 Contact Block 1 NC for 22.5 mm Pushbutton Operators




PUSHBUTTON AND PILOT LIGHTS

sprecher+
schuh

Component type	Auxiliary contact block
Range	D7
Model	N/A
Product status	Existing

The Sprecher+Schuh D7 line of operator control devices are a diverse range of 22.5mm mount pushbuttons, pilot lights, selector switches, emergency stops, ideal for use in applications requiring reliable performance. A modular design allows for easy configuration and assembly. Available in plastic and metal types, optional accessories include enclosures, legend plates, padlocks and colour caps.

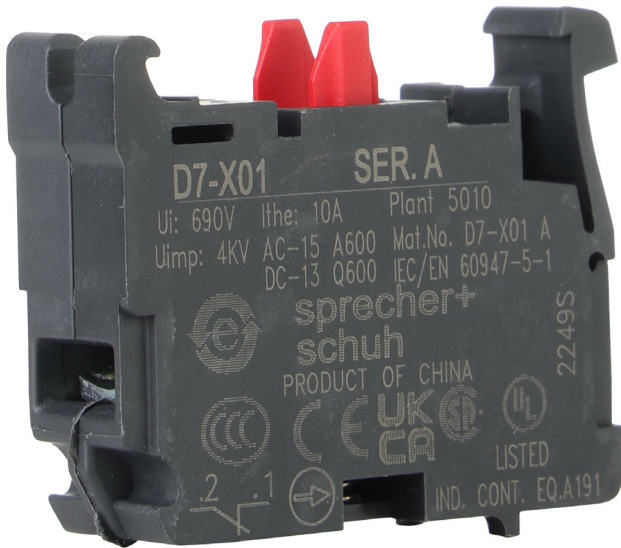

ELECTRICAL

Number of contacts as normally closed contact	1
Rated insulation voltage U_i	690 V
Rated operation current I_e at AC-15, 120 V	6 A
Rated operation current I_e at AC-15, 240 V	3 A
Rated operation current I_e at AC-15, 400 V	1.8 A
Rated operation current I_e at DC-13, 125 V	0.55 A
Rated operation current I_e at DC-13, 250 V	0.27 A
Min. contact rating current	5 mA
Min. contact rating voltage	17 V

D7X01

Sprecher and Schuh D7 Contact Block 1 NC for 22.5 mm
Pushbutton Operators



PUSHBUTTON AND PILOT LIGHTS

sprecher+schuh

DIMENSIONAL DIAGRAM

