


Self Amalgamating Tape

CP62 High Voltage Insulation Tape.

Conductor insulation for plastic insulated cables.

APPLICATION / SUITABILITY:

- Fuses quickly to form a homogenous, cavity-free compound
- Suitable for conductor insulation of polymeric insulated cables up to 69kV

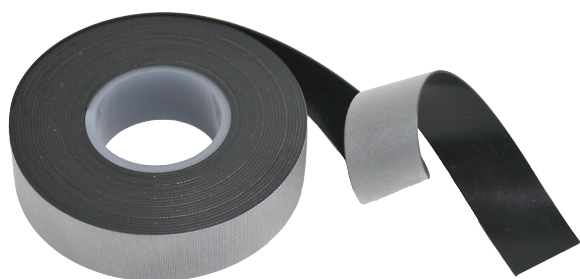

CHARACTERISTICS:

- Non-tacky
- Fully removable
- Ozone-resistant
- Weatherproof
- UV stabilised
- Excellent adherence



Model **10-411**

Technical Data	Value	Technical Data	Value
Width	19mm	Dielectric strength	42 kV/mm
Thickness	0.75mm	Specific Volume Resistivity	1 x 10¹³ MΩ
Length	4.5m	Dielectric Constant	2.8
Material	EPR-Base	Max Operating Temperature	90°C
Colour	Black	Max Temporary Temperature	130°C
Tensile Strength	3 MPa	Ozone Resistance	Ozone Resistant
Elongation at Break	900%	UV Radiation Resistance	UV stabilised

CABLE ACCESSORIES