

# PRODUCT DATASHEET

## HQI-E 150 W/NDL CL

POWERSTAR HQI-E clear | Metal halide lamps for open and enclosed luminaires



---

### AREAS OF APPLICATION

- Shopping arcades
- Conference rooms, auditoriums, libraries
- Factories and workshops
- Exhibition halls and trade fairs
- Pedestrian zones, public squares
- Outdoor applications only in suitable luminaires

---

### PRODUCT BENEFITS

- E27 screw base for simple lamp handling
- Different light colors

---

### BENEFITS OF OSRAM UV FILTER TECHNOLOGY

- Reduced material stress within the luminaire
- The UV filter on the lamp complies with the requirements of IEC 61167



**TECHNICAL DATA**

Electrical data

Nominal wattage	150.00 W
Rated wattage	150.00 W
Lamp current	1.8 A
PFC capacitor at 50 Hz	20 µF <sup>1)</sup>
Ignition voltage	3.6 / 5.0 kVp <sup>2)</sup>


<sup>1)</sup> At rated voltage and  $\cos \varphi \geq 0.9$

<sup>2)</sup> Minimum / Maximum

Photometrical data

Rated lamp efficacy (standard condition)	83 lm/W
Rated luminous flux	12500 lm
Color rendering index Ra	88
Color temperature	4200 K
Light color	842
Rated LLMF at 2,000 h	0.94
Rated LLMF at 4,000 h	0.84
Rated LLMF at 6,000 h	0.81
UV protection	Yes
Light color (designation)	Neutral White DE LUXE
Luminous flux	12500 lm

Dimensions & weight



E27  
IEC 7004-21

Diameter	55.0 mm
Length	141.0 mm
Light center length (LCL)	89.0 mm
Product weight	80.18 g

Temperatures & operating conditions

Maximum permitted outer bulb temperature	350 °C
Maximum permitted base edge temperature	210 °C

Lifespan

Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.94
Rated lamp survival factor at 6,000 h	0.50
Lifespan B50	6000 h

Additional product data

Base (standard designation)	E27
Design / version	Clear
Mercury content	8.9 mg

Capabilities


Dimmable	No
Burning position	Any
Enclosed luminaire required	No

Certificates & standards


Energy efficiency class	A
Energy efficiency class	A
Energy consumption	165 kWh/1000h

Country-specific categorizations


ILCOS	MCS/UB-150/842-H/E/SL-E27-56/141
-------	----------------------------------



Circuit diagram



Circuit diagram

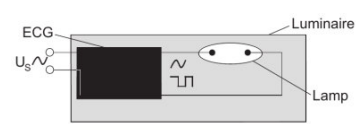

Circuit diagram

LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300434018	HQI-E 150 W/NDL CL	Shipping carton box 20	434 mm x 186 mm x 294 mm	23.73 dm <sup>3</sup>	2578.40 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.