


# INCEPTOR® MURUS

## Technical Specification

Product Code: OV2071AG15EMPC

Description: 15W LED Wall Pack - Standard With Emergency & Photocell - IP66 - CTA - Anthracite Grey

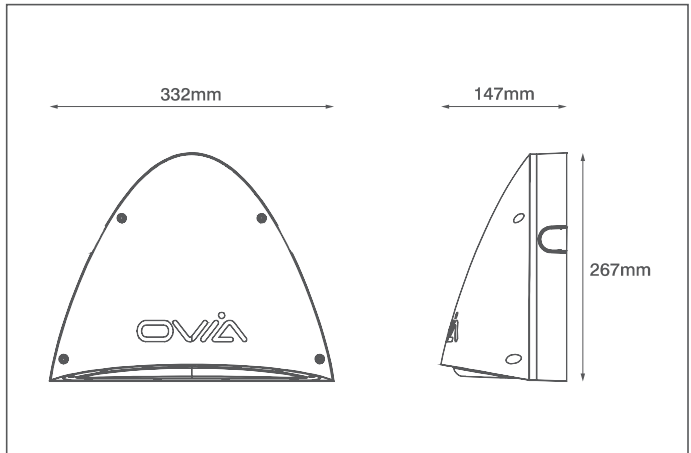

### General Information

Dimensions (mm)	267.4 (W) x 147 (D) x 332.6 (H)
Materials	Base & Cover: Powdercoated Aluminium Diffuser: Polycarbonate
Finish	Anthracite Grey (RAL 7016)
Product Weight (Kg)	3.15
Ingress Protection	IP66
Impact Rating (IK)	10
Mounting	Wall
Warranty (Years)	5
Battery Warranty (Years)	4

### Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	220-240 50
Safety Class	I
Surge Protection Installed	Yes
Circuit Wattage (W)	17
LED Wattage (W)	15
Input Current (mA)	0.065
Inrush Current	10A (152µS)
Power Factor	>0.9
Driver Information	Integrated (Tridonic)
Operating Temperature (°C)	0 to +50
Maximum Critical Temperature (°C)	+80
Input Terminations	4 Pole Push-fit Terminals

### Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	1650	1950	1650
Efficacy (lm/W)	97	114	97
Beam Angle (°)	80 x 140		
Emergency Luminous Flux (lm)	410	410	410
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50,000		

### Dimming Information

Dimmable | No

### Sensor Information




Ambient Light 'On' (Lux)	10
Ambient Light 'OFF' (Lux)	20

### Emergency Backup Information

Battery Specification	Li-Ion 2600mAh 3.7V
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

### Compatible Accessories

OVEMB3726LI - 3.7V 2600mAh LiFePo4 Battery – Serial

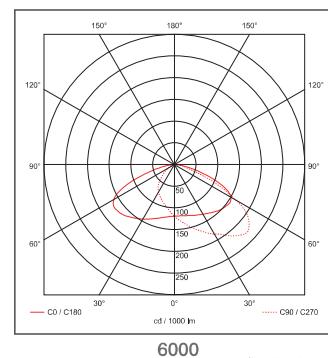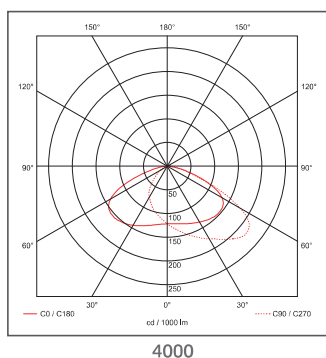

OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com