


INCEPTOR® MURUS

Technical Specification

Product Code: OV2071LG25EMPC

Description: 25W LED Wall Pack - Standard With Emergency & Photocell - IP66 - CTA - Light Grey

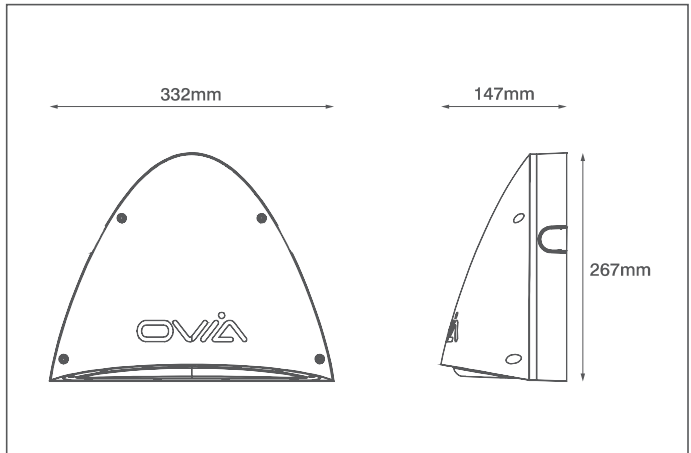

General Information

Dimensions (mm)	267.4 (W) x 147 (D) x 332.6 (H)
Materials	Base & Cover: Powdercoated Aluminium Diffuser: Polycarbonate
Finish	Light Grey (RAL 7037)
Product Weight (Kg)	3.18
Ingress Protection	IP66
Impact Rating (IK)	10
Mounting	Wall
Warranty (Years)	5
Battery Warranty (Years)	4

Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	220-240 50
Safety Class	I
Surge Protection Installed	Yes
Circuit Wattage (W)	27
LED Wattage (W)	25
Input Current (mA)	0.109
Inrush Current	15A (183µS)
Power Factor	>0.9
Driver Information	Integrated (Tridonic)
Operating Temperature (°C)	0 to +50
Maximum Critical Temperature (°C)	+80
Input Terminations	4 Pole Push-fit Terminals

Luminaire Output

Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	2500	3000	2500
Efficacy (lm/W)	92	111	92
Beam Angle (°)	80 x 140		
Emergency Luminous Flux (lm)	410	410	410
Colour Rendering Index (CRI)	>80		
Flicker Free	Yes		
LED Lifetime (L70) (Hours)	50,000		

Dimming Information

Dimmable | No

Sensor Information


Ambient Light 'On' (Lux)	10
Ambient Light 'OFF' (Lux)	20

Emergency Backup Information


Battery Specification	Li-Ion 2600mAh 3.7V
Minimum Duration (Hours)	3
Battery Warranty (Years)	4

Compatible Accessories


OVEMB3726LI - 3.7V 2600mAh LiFePo4 Battery – Serial



3000



4000



6000



OVIA Limited, Scolmore House, Mariner, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7UL United Kingdom

T: +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com