
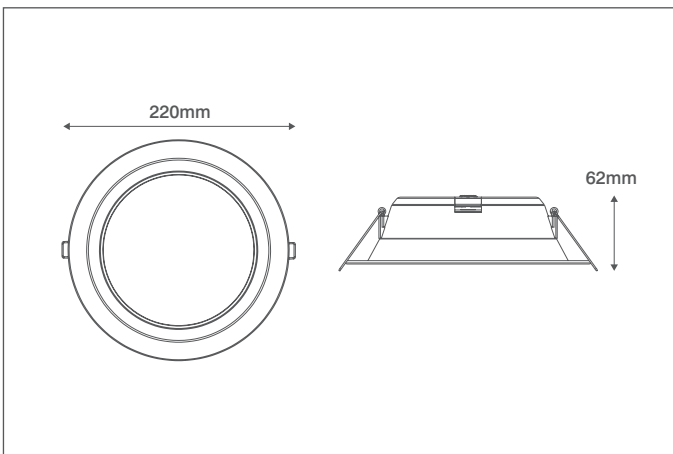


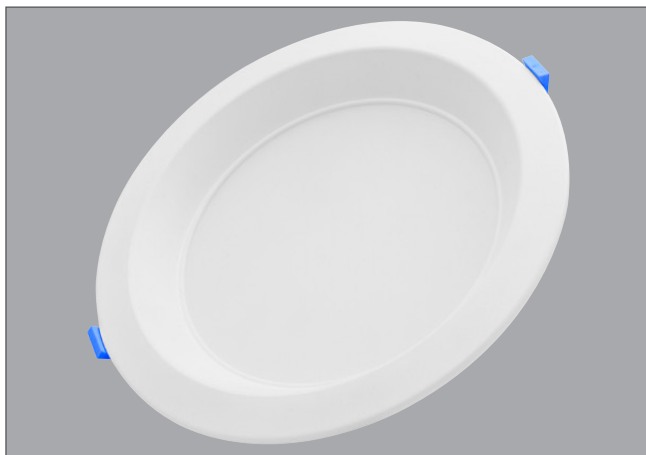

General Information

Dimensions (mm)	220 (Dia.) x 62 (D)
Materials	Bezel: Powdercoated Aluminium Diffuser & Housing: Polycarbonate
Finish	White (RAL 9003)
Product Weight (Kg)	0.32
Cutout Diameter (mm)	190
Recess Depth (mm)	57
Ingress Protection	IP20
Maximum Ceiling Thickness (mm)	40
Warranty (Years)	3

Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	200-240 50/60
Safety Class	II
Surge Protection Installed	
Circuit Wattage (W)	25
LED Wattage (W)	25
Input Current (mA)	250
Inrush Current	<60A (300uS@230V~)
Power Factor	>0.7
Driver Information	Remote Driver Supplied
Operating Temperature (°C)	-20 to +30
Maximum Critical Temperature (°C)	+85
Prewired Flow™ Connector	3 Pole CT105-F Push-fit Terminals

Luminaire Output


Colour Temperature (K)	3000	4000	6000
Typical Luminous Flux (lm)	2500	2750	2500
Efficacy (lm/W)	100	110	100
Beam Angle (°)	100		
Colour Rendering Index (CRI)	>80		
LED Lifetime (L70) (Hours)	30,000		

Dimming Information


Dimmable	No
Dimming Format	Non-Dimmable

Compatible Accessories


OVCGMF0003 - 240V~ 12.7-33.7W 3 in 1 Multi-function Dimmable Constant Current LED Driver
OVEMCG50 - 3 Hour Emergency Pack
OVEMCG50ST - 3 Hour Self-Test Emergency Pack



3000



4000



6000

