



# CorePro LEDcandle

## CorePro LEDcandle ND 5-40W E14 827 B35 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.


### Product data

General Information		Power factor (nom.)	
Cap base	E14 [ E14]		0.51
EU RoHS compliant	Yes	Voltage (Nom)	220-240 V
Nominal lifetime (nom.)	15000 h	<b>Temperature</b>	
Switching cycle	50,000X	T-Case maximum (nom.)	81 °C
<b>Light Technical</b>		<b>Controls and Dimming</b>	
Colour Code	827 [ CCT of 2,700 K]	Dimmable	No
Luminous flux (nom.)	470 lm	<b>Mechanical and Housing</b>	
Colour designation	Warm white (WW)	Lamp Finish	Frosted
Correlated Colour Temperature (Nom)	2700 K	Bulb shape	B35 [ B 35mm]
Luminous efficacy (rated) (nom.)	94.00 lm/W	<b>Approval and Application</b>	
Colour consistency	<6	Energy consumption kWh/1,000 hours	5 kWh
Colour rendering index (nom.)	80	<b>Product Data</b>	
LLMF at end of nominal lifetime (nom.)	70 %	Full product code	871951431250000
<b>Operating and Electrical</b>		Order product name	CorePro LEDcandle ND 5-40W E14 827 B35 FR
Input frequency	50 to 60 Hz	EAN/UPC – product	8719514312500
Power (Rated) (Nom)	5 W	Order code	31250000
Lamp current (nom.)	44 mA	SAP numerator – quantity per pack	1
Wattage equivalent	40 W	Numerator – packs per outer box	10
Starting time (nom.)	0.5 s		
Warm-up time to 60% light (nom.)	0.5 s		

# CorePro LEDcandle

SAP material	929002968402
SAP net weight (piece)	0.040 kg



## Dimensional drawing



Candle B35 5-40W 470lm 2700K E14 ND FR


Product	D	C
CorePro LEDcandle ND 5-40W E14 827 B35 FR	45 mm	87 mm

## Photometric data

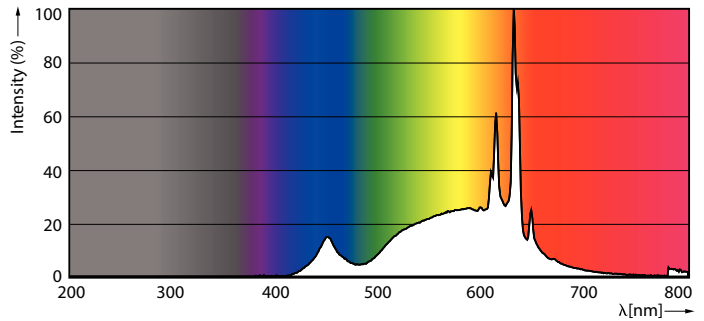

LEDcandle CorePro 5W B35 E14 827-GUL



LEDcandle CorePro 5W B35 E14 827 FR-POC



LEDcandle CorePro B35 5W E14 827 FR-LDD

# CorePro LEDcandle

## Lifetime

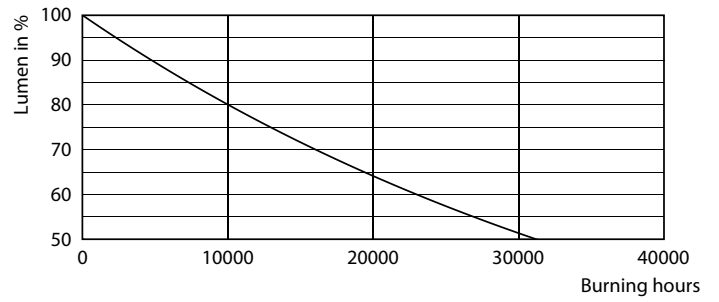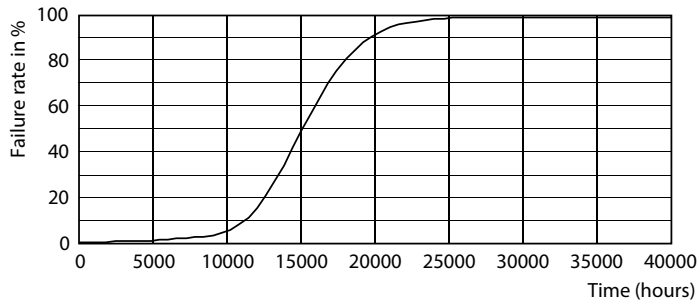

15K LED

15K LMP

