



# MASTER Ultra-efficient LED candles and lustres

## MAS LEDCandleND2.3-40W E14 840 B35CL GUE

This is the most efficient LED candle from Philips brand. 210lm/W helps to concrete the company statement of sustainability. 50000 hour lifetime helps to extend the replacement cycle to reduce the waste. This is not only a high SPEC product, but also keeps the light quality of Philips brand

### Product data

General Information	
Cap base	E14
Nominal lifetime	50,000 h
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Colour Code	840 [CCT of 4000K]
Luminous Flux	485 lm
Colour designation	Cool White (CW)
Correlated Colour Temperature (Nom)	4000 K
Luminous efficacy (rated) (nom.)	210 lm/W
Colour consistency	<6
Colour rendering index (CRI)	80
LLMF at end of nominal lifetime (nom.)	70 %

Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input frequency	50 to 60 Hz
Power Consumption	2.3 W
Lamp current (nom.)	25 mA
Wattage equivalent	40 W
Starting time (nom.)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.4
Voltage (nom.)	220-240 V
Temperature	
T-Case maximum (nom.)	70 °C

# MASTER Ultra-efficient LED candles and lustres

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Lamp Finish	Clear
Bulb material	Glass
Bulb shape	B35
Net Weight (Piece)	0.021 kg

## Approval and Application

Energy Efficiency Class	A
Energy consumption kWh/1,000 hours	3 kWh
EPREL Registration Number	1443706
Photobiological risk	Photobiological risk group 1 @ 200mm to EN62471
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM)	1
Stroboscopic effect	0.4

Ambient temperature range	-20 to +45 °C
---------------------------	---------------


## Application Conditions

Can it be used in closed luminaires	No
-------------------------------------	----

## Product Data



Order product name	MAS LEDCandleND2.3-40W E14 840 B35CL GUE
Full product name	MAS LEDCandleND2.3-40W E14 840 B35CL GUE
Full EOC	872016918895200
Order code	18895200
Material no. (12 NC)	929003626002
Numerator – quantity per pack	1
EAN/UPC – Product/Case	8720169188952
Numerator – packs per outer box	10
EAN/UPC - Case	8720169188969

## Dimensional drawing



Product	D	C
MAS LEDCandleND2.3-40W E14 840 B35CL GUE	35 mm	111 mm

## Photometric data

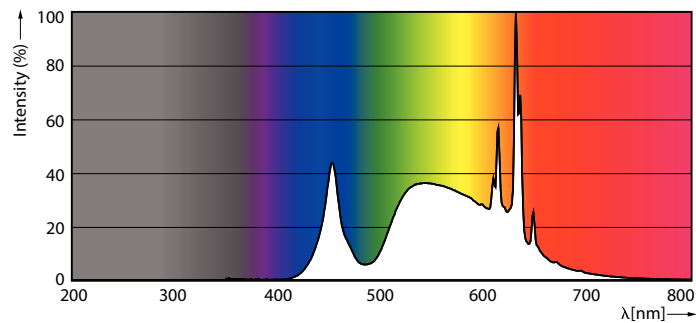


Spectral Power Distribution Colour - MAS LEDCandleND2.3-40W E14 840 B35CL GUE

Light Distribution Diagram - MAS LEDCandleND2.3-40W E14 840 B35CL GUE

# MASTER Ultra-efficient LED candles and lustres

## Photometric data



General uniform lighting - MAS LEDCandleND2.3-40W E14 840 B35CL GUE

## Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram - MAS LEDCandleND2.3-40W E14 840 B35CL GUE

