



Trueforce CorePro LED HPL



TForce Core LED HPL 24.5W E27 840 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short pay-back to replace High-Intensity Discharge (HID) lamps. This new generation of LED Core post-top lamps brings all the energy-efficiency and long-lifetime benefits of LED-to-HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

Warnings and Safety

- Installation must always be performed by a qualified electrician or installer. Use the installation guide for instructions.

Product data

General Information		Luminous efficacy (rated) (nom.)		163 lm/W
Cap base	E27	Colour consistency	<6	
Nominal lifetime	25,000 h	Colour rendering index (CRI)	80	
Switching Cycle	50,000	LLMF at end of nominal lifetime (nom.)	70 %	
Lighting Technology	LED	Photobiological safety according to EN 62471	RG0	
Flux measurement reference	Sphere			
Light Technical		Operating and Electrical		
Colour Code	840 [CCT of 4000K]	Input frequency	50 to 60 Hz	
Beam angle (nom.)	300 degree(s)	Power Consumption	24.5 W	
Luminous Flux	4,000 lm	Lamp current (nom.)	175 mA	
Colour designation	Cool White (CW)	Starting time (nom.)	0.5 s	
Correlated Colour Temperature (Nom)	4000 K	Warm-up time to 60% light	0.5 s	
		Power Factor (Fraction)	0.5	

Trueforce CorePro LED HPL

Voltage (nom.)	220-240 V
Ballast Compatibility	Mains only
Inrush current at mains	10.6
Max. lamp no. on MCB B type 10A – Mains	30
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – Mains	49
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-

Temperature

T-Case maximum (nom.)	44.6 °C
-----------------------	---------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Lamp Finish	Frosted
Bulb shape	ED90
Net Weight (Piece)	0.140 kg

Approval and Application

Energy Efficiency Class	C
-------------------------	---

Energy consumption kWh/1,000 hours	25 kWh
EPREL Registration Number	1962815
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM)	1
Stroboscopic effect	1.6
Ambient temperature range	-30 to +45 °C


Application Conditions

Can it be used in closed luminaires	Yes
-------------------------------------	-----

Product Data

Order product name	TForce Core LED HPL 24.5W E27 840 FR	
Full product name	TForce Core LED HPL 24.5W E27 840 FR	
Full EOC	872016933635300	
Order code	33635300	
Material no. (12 NC)	929003836602	
Numerator – quantity per pack	1	
EAN/UPC – Product/Case	8720169336353	
Numerator – packs per outer box	6	
EAN/UPC – Case	8720169336360	


Dimensional drawing




Product	D	C
TForce Core LED HPL 24.5W E27 840 FR	91.5 mm	218 mm

Trueforce CorePro LED HPL


Photometric data

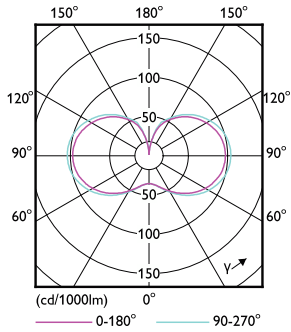

Light Distribution Diagram - TForce Core LED HPL 24.5W E27 840 FR

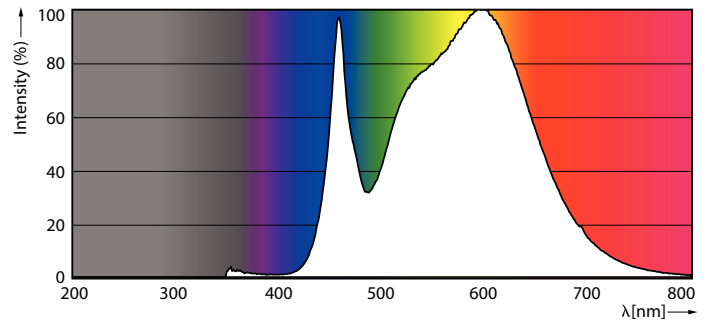


Spectral Power Distribution Colour - TForce Core LED HPL 24.5W E27 840 FR




Technical Parameters (1) Page Lighting (1) Page (1)

General uniform lighting - TForce Core LED HPL 24.5W E27 840 FR

Lifetime

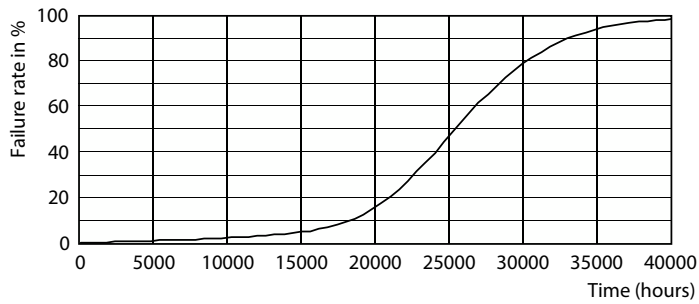

Life Expectancy Diagram

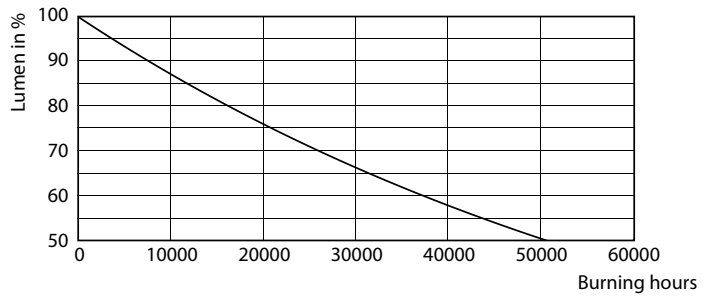

Lumen Maintenance Diagram - TForce Core LED HPL 24.5W E27 840 FR

Trueforce CorePro LED HPL

