


Eco Emergency Batten Gen4

The Pierlite Eco LED Batten Gen4 is a one box solution with Colour and Lumen select feature. The quick release clips, removable connector and sealed LED module makes it easy to install and maintain. With up to 110lm/W, the efficacy makes it an ideal replacement for traditional fluorescent battens.

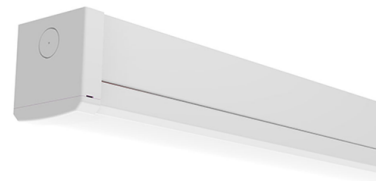

- Up to 120lm/W efficiency.
- Clean and uniform opal diffuser for even light distribution
- Lumen select 2ft(11W to 18W) 4ft(18W to 36W) and 5ft(30W to 50W). Colour Select (4000K, 5000K, 6500K)

LUMEN SELECT[®] | COLOUR SELECT[®]



80

CRI



IP20

Ingress Protection Rating



5SDCM

MacAdam Steps



0 to 40

Operating Temperature



Non - Dimmable

Dimming



5 Years

Warranty



Symmetric

Beam Distribution



120°

Beam Angle

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	CLASSIFICATION
ECOBAT202ECSLSG 4M	18W	1900lm	120lm/W	4000K	L603 x W74 x H74 mm	0.80kg	14A	C0/C180: D40 & C90/C270: D25
	16W	1600lm		5000K				
	14W	1400lm		6500K				
	11W	1100lm						
ECOBAT404ECSLSG 4M	36W	4000lm	120lm/W	4000K	L1164 x W74 x H74 mm	1.5kg	17A	C0/C180: D50 & C90/C270: D25
	30W	3500lm		5000K				
	25W	3000lm		6500K				
	18W	2300lm						
ECOBAT505ECSLSG 4M	50W	6900lm	120lm/W	4000K	L1500 x W74 x H74 mm	1.8kg	24A	C0/C180: D63 & C90/C270: D40
	45W	6300lm		5000K				
	35W	5000lm		6500K				
	30W	4200lm						
		7200lm						
		6800lm						
		6000lm						
		5200lm						
	4300lm							

EMERGENCY MODE WATTAGE	OPTION	BATTERY	BATTERY CHARGE	BATTERY VOLTAGE	BATTERY CAPACITY	TESTING SYSTEM
3W	Maintained	LiFePO4	2hr	6.4V	1500mA	Manual

ACCESSORY CODE	DESCRIPTION
BATPK15002L213W	

AS/NZS 2293.1:2018 Classification Table


ECOBAT202ECSLSG4M C0/C180: D40 & C90/C270: D25			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	15.7	16.5
3.3	18.1	16.1	18.1
3.6	19.8	16.4	19.8
4	21.8	16.8	21.8
4.5	22.5	17.3	22.5
5	23.1	17.6	23.1
6	24.1	18.1	24.1
7	24.9	18.3	24.9
8	25.4	18.2	25.4

ECOBAT202ECSLSG4M


ECOBAT404ECSLSG4M C0/C180: D50 & C90/C270: D25			
Allowable Luminaire Mounting Height (m)	Luminaire Maximum Spacing for each Plane (M)		
	C0	C90 / C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	15.7	16.5
3.3	18.1	16.1	18.1
3.6	19.8	16.4	19.8
4	21.8	16.8	21.8
4.5	22.5	17.3	22.5
5	23.1	17.6	23.1
6	24.1	18.1	24.1
7	24.9	18.3	24.9
8	25.4	18.2	25.4

ECOBAT404ECSLSG4M


Line Drawings

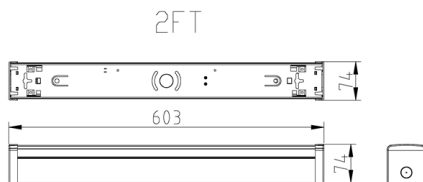

ECOBAT202ECSLSG4M

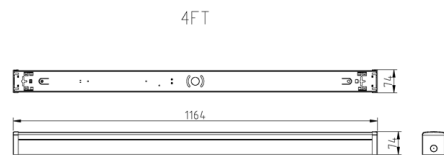

ECOBAT404ECSLSG4M

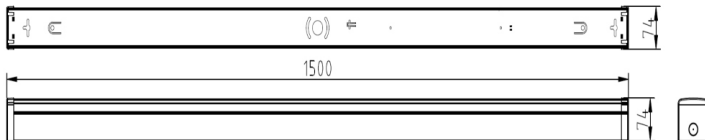

ECOBAT505ECSLSG4M

Product Images

