

MaxiMaster Floodlight Gen3

The MaxiMaster Floodlight has always had a trusted history of reliability through all variations of installations, the Gen3 is no exception it builds on the adaptability and versatility of its predecessor, the third generation provides the same shape and form as the generation 2 but with the added features of cable entries, large terminal block, high surge immunity, lumen and colour select. The Gen3 was built for the harsh Australian conditions for installations such as general industrial and public areas including warehousing, regional areas, transport facilities, custodial, schools, and heavy industry. The lumen and colour select technology provides the ability to have 1 luminaire with multiple wattages/lumen outputs in the same housing making it easier to maintain the same appearance through your installation.



LUMEN SELECT[™] | COLOUR SELECT

- Provided with multiple wattages/lumen outputs in 1 fitting with wattages of 100W/150W/200W/250W and colour select with 3000K/4000K/5000K
- Supplied with 2 x 20mm cable entries, 2 x 20mm metal cable gland, 6mm² terminal block and an additional 10KV surge protection installed to the 4KV driver surge immunity
- L80/B10 = 54,000 hours @ an ambient temp of 50°C



80

CRI



IP66

Ingress Protection Rating



IK08

Impact Rating



0 to 50

Operating Temperature



Non - Dimmable

Dimming




5 Years

Warranty

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	INRUSH CURRENT DURATION
MML100LSCSA	100W	15000lm	150lm/W	4000K	L279 x W267 x H124 mm	2.8kg	16.2A	360µs
	70W	11000lm	160lm/W					
	50W	8200lm	155lm/W					
	30W	4800lm	159lm/W					
		13200lm	130lm/W	3000K				
		9800lm	141lm/W					
		7500lm	147lm/W					
		4500lm	148lm/W					
		14200lm	142lm/W	5000K				
		10800lm	152lm/W					
MML100LSCSS	100W	15000lm	150lm/W	4000K	L279 x W267 x H124 mm	2.8kg	16.2A	360µs
	70W	11100lm	161lm/W					
	50W	8300lm	160lm/W					
	30W	4800lm	159lm/W					
		13300lm	131lm/W	3000K				
		10000lm	142lm/W					
		7500lm	144lm/W					
	4500lm	149lm/W						

MML100LSCSS		14400lm	141lm/W	5000K				
		10800lm	153lm/W					
		8300lm	156lm/W					
		4800lm	159lm/W					
MML100LSGSA	100W	15000lm	150lm/W	4000K	L279 x W267 x H124 mm	2.8kg	16.2A	360µs
MML100LSGSS	100W	15000lm	150lm/W	4000K	L279 x W267 x H124 mm	2.8kg	16.2A	360µs
MML250LSCSA	250W	31220lm	150lm/W	3000K	L523 x W342 x H185 mm	6.2kg	65A	240µs
	200W	25436lm	139lm/W					
	150W	20192lm	145lm/W					
	100W	13433lm	152lm/W	4000K				
		33889lm	150lm/W					
		27228lm	155lm/W					
		21258lm	158lm/W					
		13798lm	161lm/W	5000K				
		32387lm	137lm/W					
		26550lm						
		21056lm	151lm/W					
13809lm								
MML250LSCSS	250W	32789lm	158lm/W	3000K	L523 x W342 x H185 mm	6.2kg	65A	240µs
	200W	26718lm	146lm/W					
	150W	21150lm	152lm/W	4000K				
	100W	14049lm	169lm/W					
		28389lm	162lm/W	5000K				
		34073lm	145lm/W					
		27857lm	153lm/W					
	22079lm	159lm/W						

Line Drawings

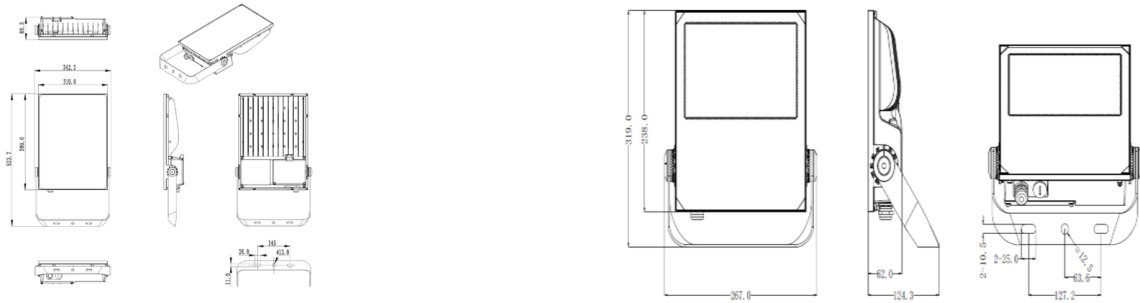

MML250LSCSA, MML250LSCSS

Product Images



MML250LSCSA



MML250LSCSA



MML250LSCSS



MML250LSCSS



MML250LSCSS



MML100LSCSA



MML100LSCSS





MML100LSCSA



MML100LSCSS



MML100LSCSA

