

## Nipper Batten Gen2

The NIPPER Gen2 batten is an efficient wide base LED linear batten designed in a sealed removable LED module and a white metal back plate with large terminal blocks for ease of installation. The frosted diffuser is made from impact resistant material that produce clean light, ideal for surface mount or suspended installations



- Designed with a wide 130mm width base to easily replace old and energy consuming twin fluorescent battens.
- Flicker free LED driver built-in for increased visual acuity and comfort.
- Option for emergency with Lithium Iron Phosphate Battery 2.5W @ 313lm available

LUMEN<sup>SELECT</sup> | COLOUR<sup>SELECT</sup>



80

CRI



IP20

Ingress Protection Rating



5SDCM

MacAdam Steps



0 to 40

Operating Temperature



54,000hrs  
(L80/B50)  
@40 °C

Lifetime



5 Years

Warranty



Symmetric



Beam Distribution

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	INRUSH CURRENT DURATION	
NIPBAT202ECSLSG2	18W	1900lm	105lm/W	4000K	L630 x W130 x H74 mm	1.2kg	14A	120µs	
	14W	1500lm							
		1600lm							
	11W	1200lm							
		1300lm							
		2100lm		5000K					
		1900lm		6500K					
NIPBAT404ECSLSG2	16W	1700lm	110lm/W	4000K	L1230 x W130 x H74 mm	2.1kg	17A	140µs	
		1800lm							
	36W	4000lm							
		4400lm							5000K
	30W	3800lm							
		3500lm							6500K
	25W	3000lm							
	3300lm								
NIPBAT505ECSLSG2	20W	2400lm	125lm/W	4000K	L1500 x W130 x H74 mm	2.6kg	25A	135µs	
		2600lm							
	50W	6300lm							
		6600lm							5000K
		6200lm							6500K
	45W	5700lm							
		5900lm							
	5600lm								
	35W	4700lm							

NIPBAT505ECSLSG2	4800lm
	4600lm
30W	3900lm
	4000lm


Line Drawings

---

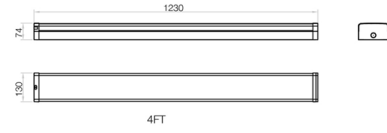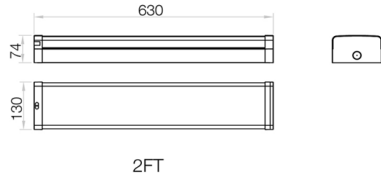

NIPBAT202ECSLSG2

NIPBAT404ECSLSG2

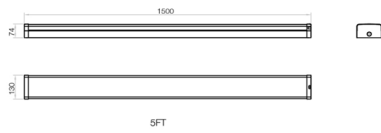

NIPBAT505ECSLSG2



NIPBAT202ECSLSG2



NIPBAT404ECSLSG2



NIPBAT505ECSLSG2