

Product Data Sheet

Product Code:

Issue No.

Issue Date:

Issue by:

100S4

A

16.06.09

D.B.P

Description

100A Four Pole Isolator


General Characteristics

Standards	BSEN60947-3
Current rating	100A
Voltage rating	230V/400V a.c.
Insulation Voltage	690V (Tested at 2kV ac)
Impulse Withstand Voltage	4kV
Pollution Degree	3
Rated Duty	Uninterrupted duty (>8h)
Enclosure material	Urea
Colour	Light Grey - RAL7035
IP Rating	IP2X
Cable Entry Facility	Box Terminals
No of Modules	4
No. of Poles	4
Short Circuit rating	2kA for 1sec (Short time withstand current)
Terminal capacity (In)	50mm ²
Terminal capacity (Out)	50mm ²
Terminal Tightening Torque	2 - 2.5Nm
Utilisation category	AC22B



Device shown is 100A unit

Designation for triple pole Switch Disconnecter (Neutral being right-hand pole)

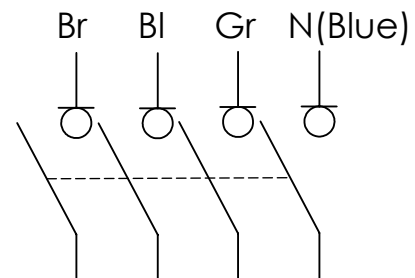

Dimensions

