

# Product Data Sheet



Product Code:	Issue No.	Issue Date:	Issue by:
<b>125S4</b>	<b>A</b>	<b>16.06.09</b>	<b>D.B.P</b>

Description
<b>125A Four Pole Isolator</b>


## General Characteristics

Standards	BSEN60947-3
Current rating	125A
Voltage rating	230V/400V a.c.
Insulation Voltage	690V (Test at 2kV ac)
Impulse Withstand Voltage	4kV
Pollution Degree	3
Rated Duty	Uninterrupted duty (>8h)
Enclosure material	Urea
Colour	Light Grey - RAL7035
IP Rating	IP2X
Cable Entry Facility	Box Terminals
No of Modules	4
No. of Poles	4
Short Circuit rating	2kA for 1sec (Short time withstand current)
Terminal capacity (In)	50mm <sup>2</sup>
Terminal capacity (Out)	50mm <sup>2</sup>
Terminal Tightening Torque	2 - 2.5Nm
Utilisation category	AC22B



Device shown is 100A unit

Designation for triple pole Switch Disconnecter (Neutral being right-hand pole)

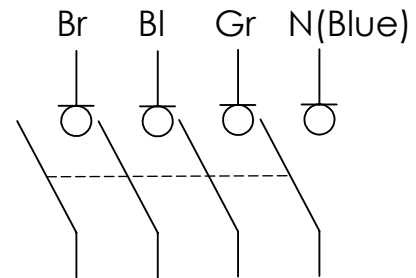

## Dimensions

