

Product Code 200BC4	Product Range Busbar chambers	Issue No. B	Issue Date April 2026	Issue By T.T.
-------------------------------	----------------------------------	----------------	--------------------------	------------------

Description

4 pole horizontal busbar chamber.
Steel enclosure.

Features

High fault level.
Modern design to latest standards.
Robust, industrial style chamber for more cabling space.





General Characteristics

Standards	BSEN61439-1.
Current Rating	200A
Voltage Rating	400V
Fault Current Rating	36kA lcc. Remote MCCB or BS88 fuse protection
Dielectric strength	2000V ac
IP Rating	3X
Pollution Degree	3
No. of Poles	4
Connection bolts supplied	1x M8 bolt for each pole
Terminal Torque – M8	20Nm (BLC8/23)
Insulation Voltage (Ui)	690V
Rated frequency	50 / 60Hz
Equipment Type	Fixed
Approx. Weight kg	24
Enclosure	1.6mm mild steel. Screw on end plates. Plain top, bottom and sides. Drill to suit site requirements. Bolt on front cover, Pozi screw.
Finish	RAL 7035. Powder coated, electrostatically applied.
Ambient operating temperature	-5 to 40 °C. Not exceeding average of 35 °C in any 24 hour period.
Maximum altitude	2000m
EMC environment	Type A

Product Code 200BC4	Product Range Range	Issue No. B	Issue Date April 2026	Issue By T.T.
-------------------------------	------------------------	----------------	--------------------------	------------------

Dimensions.

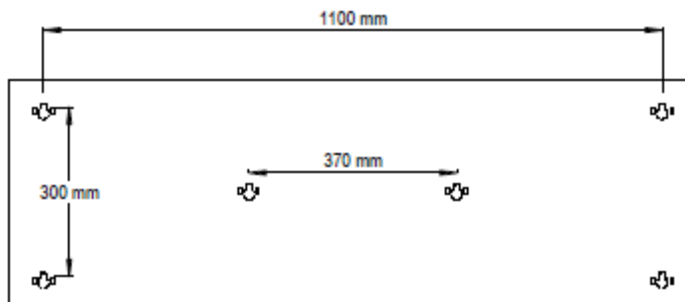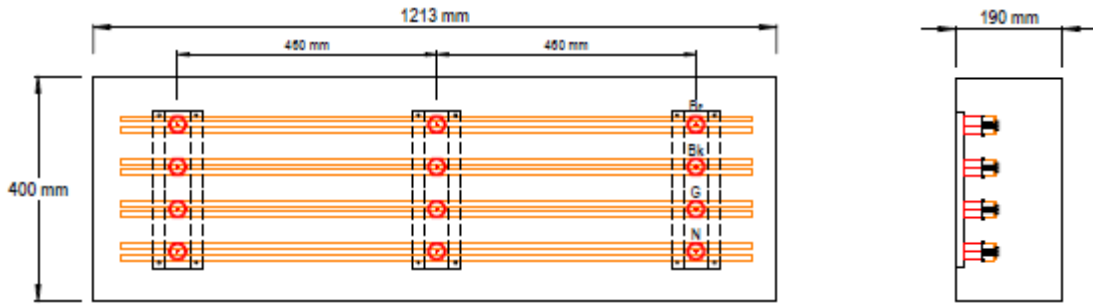

4 x Connection bolts supplied

BLC8/23.
Connection bolt – Place copper washer against busbar face. Place lug on top of copper washer.

Additional information

Usage	Intended for use by skilled persons or instructed persons.
Electrical	EMC environment: Environment type A.
Installation	Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use, dry conditions and NOT where high levels of humidity and temperature are experienced.