

Product Code	Product Range	Issue No.	Issue Date	Issue By
<b>ABX4S1T2</b>	Distribution Boards	A	15/01/2026	TT

### Description

4 way, triple pole and neutral MCB board fitted with a Type 2 Surge Protection device.

### Features

High fault level.  
Modern design to latest standards.  
4 pole switch disconnecter main switch.




### General Characteristics

Standards: Board SPD	BS EN 61439-3. BS EN 61439-1. EN61643-11 Type 2. IEC 61643-11 Class II.
Current Rating	80A continuous, 100A intermittent.
Voltage Rating	400V AC
Fault Current Rating	10kA
Board type to BS EN 61439	B – accepts multi pole circuit breakers.
IP Rating	3X
Pollution Degree	3
No. of Poles	3 + neutral and earth bars.
Terminal Capacity	50mm.sq.
Main Switch Disconnecter	
Terminal Torque	2.5Nm
Insulation voltage (Ui)	690V
Rated frequency (Hz)	50
Equipment Type	Fixed
Weight (kg)	5.7
Earth & neutral bar terminal capacity	16mm.sq.
Cable entry facility	Top gland plate removable
Door	Side hinged door (removable) with turn catch
Enclosure	1.2mm cold rolled steel with epoxy paint finish
Colour	RAL7035

Product Code	Product Range	Issue No.	Issue Date	Issue By
<b>ABX4S1T2</b>	Distribution Boards	A	15/01/2026	TT

**Dimensions.**

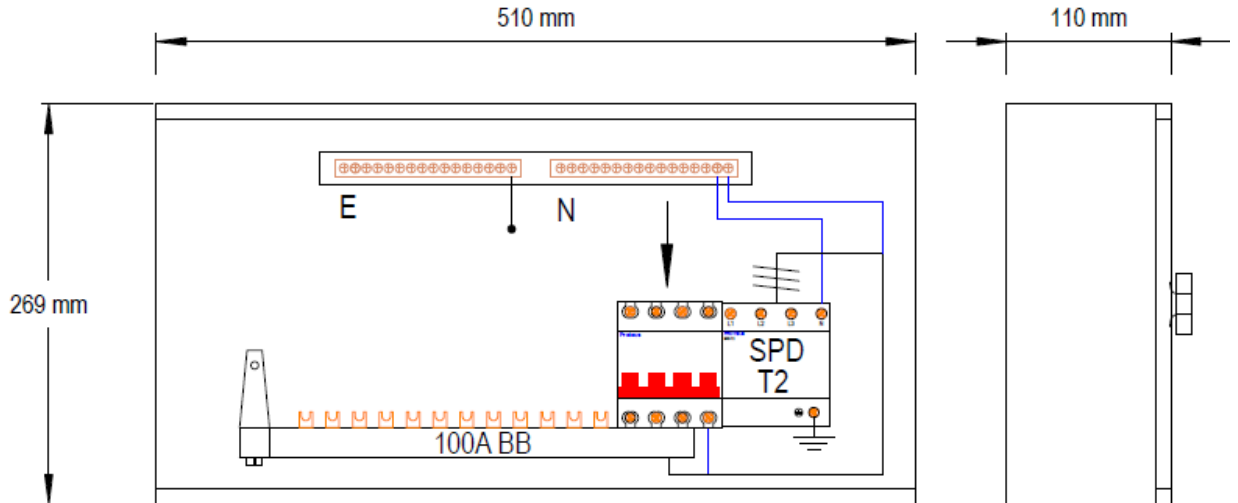

**Additional information**

Usage	Intended for use by skilled persons or instructed persons.
Electrical	EMC environment: Environment type A.
Installation	Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use, dry conditions and <b>NOT</b> where high levels of humidity and temperature are experienced.