

# Product Data Sheet



Product Code: <b>U160S</b>	Issue No. <b>B</b>	Issue Date: 16/04/2018	Issue by: T. Tombs
----------------------------	--------------------	------------------------	--------------------


**Description**  
160A 3 pole switch-disconnector with bolted neutral link. Metal enclosure to IP3X.

**General Characteristics**

Standards.	BSEN 60947-1, BSEN 60947-3.
Current rating.	160A AC21 & AC22A 160A AC23A. 75kW.
Voltage rating.	230 / 400V ac. 50/60Hz.
Fault current rating. RMS.	65 kA with 160A BS88 back up fuse.
Link bolt torque	15 Nm.
Enclosure. Finish: RAL 7035 Matt.	1.2mm mild steel case. 2mm mild steel screw fixed gland plates. Paint finish electrostatically applied.
Handle.	Padlockable OFF. Push red button to reveal padlock access slot. Lock not provided.
IP Rating.	31
Impulse (U imp)	8 kV.
Pollution degree.	3
No of poles.	3 switched. Bolted neutral.
Incomer terminal capacity.	M8 bolt. 70mm <sup>2</sup> 95mm <sup>2</sup> with spreader box.
Incomer terminal tightening torque.	20 Nm
Cable entry facility. Top & bottom.	Blank removable steel gland plates.
Covers / Door.	Full size door. Interlocked with handle. Access only when switched OFF.
Equipment type.	Fixed stationary
Weight.	11.25 kg



<b>Switchgear Fitted</b>	
Device	Rating
3 x solid links	160A

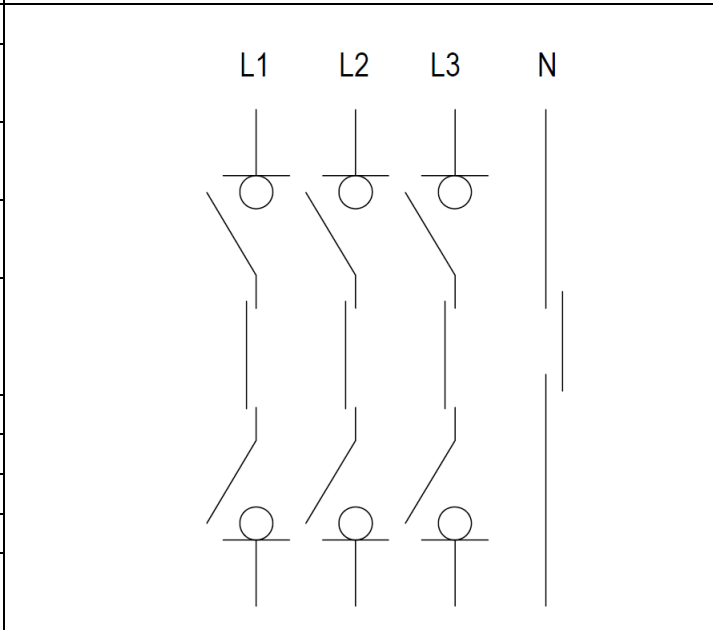

**Accessories.**

UCB1	Cable spreader box to suit U63FS to U160FS. Height 200mm, width 350mm, depth 185mm. Switch gland plate fits onto end of spreader box.
------	---

# Product Data Sheet



Product Code: <b>U160S</b>	Issue No. <b>B</b>	Issue Date: 16/04/2018	Issue by: T. Tombs
----------------------------	-----------------------	---------------------------	-----------------------

**Description**  
160A 3 pole switch-disconnector with bolted neutral link. Metal enclosure to IP3X.

Key Dimensions	Mounting hole positions	Fixing foot detail

**Additional information.**

**Usage**  
Intended for use by skilled persons or instructed persons.

**Electrical**  
Earth & Neutral terminals : Earth bolt M10  
Rated frequency: 50 / 60Hz.  
Rated operational voltage: 230 / 400V  
Rated insulation voltage Ui: 1000V

EMC environment: Environment type A.

**Physical**  
Ambient operating temperature -5 to 40 °C  
(Not exceeding average of 35 °C in any 24 hour period).  
Maximum altitude 2000m.

**Installation**  
Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use and dry conditions and **NOT** where high levels of humidity and temperature are experienced.  
Note: IP rating of enclosures can be compromised if correct use of glands is not followed when installing unit.