

# Product Data Sheet




Product Code: <b>U200FS</b>	Issue No. <b>B</b>	Issue Date: <b>11/04/2018</b>	Issue by: <b>T. Tombs</b>
-----------------------------	--------------------	-------------------------------	---------------------------

**Description**  
200A 3 pole switch-disconnector-fuse with bolted neutral link. Metal enclosure to IP3X.

**General Characteristics**

Standards.	BSEN 60947-1, BSEN 60947-3.
Current rating.	200A AC21 & AC22A 200A AC23A. 110kW.
Voltage rating.	230 / 400V ac. 50/60Hz.
Fault current rating. RMS.	65 kA with 200A BS88 fuse.
Fuse	BS88 part 2. Centre tag, 111mm fixings.
Torque	15 Nm.
Enclosure. Finish: RAL 7035 Matt.	1.2mm mild steel case. 2mm mild steel screw fixed gland plates. Paint finish electrostatically applied.
Handle.	Padlockable OFF. Push red button to reveal padlock access slot. Lock not provided.
IP Rating.	31
Impulse (U imp)	8 kV.
Pollution degree.	3
No of poles.	3 switched. Bolted neutral.
Incomer terminal capacity.	M10 bolt. 150mm <sup>2</sup> 185mm <sup>2</sup> with spreader box.
Incomer terminal tightening torque.	40 Nm
Cable entry facility. Top & bottom.	Blank removable steel gland plates.
Covers / Door.	Full size door. Interlocked with handle. Access only when switched OFF.
Equipment type.	Fixed stationary
Weight.	20.13kg
<b>Switchgear Fitted</b>	
Device	Rating
3 x fuses	200A gG

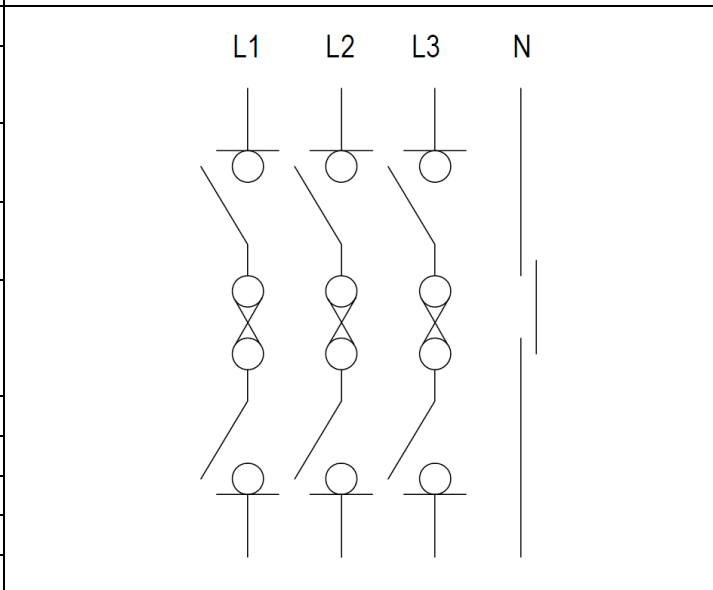

**Accessories.**

UCB2	Cable spreader box to suit U200FS to U315FS. Height 200mm, width 400mm, depth 255mm. Switch gland plate fits onto end of spreader box.
Replacement fuse.	PDD200.

# Product Data Sheet



Product Code: <b>U200FS</b>	Issue No. <b>B</b>	Issue Date: <b>11/04/2018</b>	Issue by: <b>T. Tombs</b>
-----------------------------	--------------------	-------------------------------	---------------------------

## Description

200A 3 pole switch-disconnector-fuse with bolted neutral link. Metal enclosure to IP3X.

## Key Dimensions

Key Dimensions	Mounting hole positions	Fixing foot detail

**Additional information.**

**Usage**  
Intended for use by skilled persons or instructed persons.

**Electrical**  
Earth & Neutral terminals : Earth bolt M10  
Rated frequency: 50 / 60Hz.  
Rated operational voltage: 230 / 400V  
Rated insulation voltage  $U_i$ : 1000V  
Fuses: BS88 part 2.  
EMC environment: Environment type A.

**Physical**  
Ambient operating temperature -5 to 40 °C  
(Not exceeding average of 35 °C in any 24 hour period).  
Maximum altitude 2000m.

**Installation**  
Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use and dry conditions and **NOT** where high levels of humidity and temperature are experienced.  
Note: IP rating of enclosures can be compromised if correct use of glands is not followed when installing unit.