

Product Data Sheet




| | | | |
|---------------------------|-----------|-------------|-----------|
| Product Code: U63S | Issue No. | Issue Date: | Issue by: |
| Description | B | 16/04/2018 | T. Tombs |

63A 3 pole switch-disconnector with bolted neutral link. Metal enclosure to IP3X.

General Characteristics

| | |
|---|---|
| Standards. | BSEN 60947-1, BSEN 60947-3. |
| Current rating. | 63A AC21 & AC22A 63A AC23A. 33kW. |
| Voltage rating. | 230 / 400V ac. 50/60Hz. |
| Fault current rating. RMS. | 65 kA with 63A BS88 back up fuse. |
| Link bolt torque | 15 Nm. |
| Enclosure. Finish: RAL 7035 Matt. | 1.2mm mild steel case. 2mm mild steel screw fixed gland plates. Paint finish electrostatically applied. |
| Handle. | Padlockable OFF. Push red button to reveal padlock access slot. Lock not provided. |
| IP Rating. | 31 |
| Impulse (U imp) | 8 kV. |
| Pollution degree. | 3 |
| No of poles. | 3 switched. Bolted neutral. |
| Incomer terminal capacity. | M8 bolt. 70mm ² 95mm ² with spreader box. |
| Incomer terminal tightening torque. | 20 Nm |
| Cable entry facility. Top & bottom. | Blank removable steel gland plates. |
| Covers / Door. | Full size door. Interlocked with handle. Access only when switched OFF. |
| Equipment type. | Fixed stationary |
| Weight. | 11.25 kg |
| Switchgear Fitted | |
| Device | Rating |
| 3 x solid links | 63A |

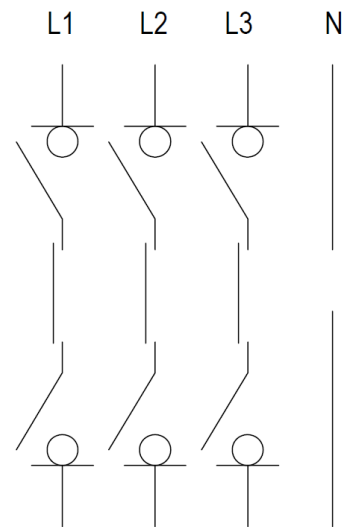

Accessories.

| | |
|------|---|
| UCB1 | Cable spreader box to suit U63FS/S to U160FS/S. Height 200mm, width 350mm, depth 185mm. Switch gland plate fits onto end of spreader box. |
|------|---|

Product Data Sheet



| | | | |
|---------------------------|-----------|-------------|-----------|
| Product Code: U63S | Issue No. | Issue Date: | Issue by: |
| | B | 16/04/2018 | T. Tombs |

Description
63A 3 pole switch-disconnector with bolted neutral link. Metal enclosure to IP3X.

| Key Dimensions | Mounting hole positions | Fixing foot detail |
|----------------|-------------------------|--------------------|
| | | |

Additional information.

Usage
Intended for use by skilled persons or instructed persons.

Electrical
Earth & Neutral terminals : Earth bolt M10
Rated frequency: 50 / 60Hz.
Rated operational voltage: 230 / 400V
Rated insulation voltage U_i : 1000V

EMC environment: Environment type A.

Physical
Ambient operating temperature -5 to 40 °C
(Not exceeding average of 35 °C in any 24 hour period).
Maximum altitude 2000m.

Installation
Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use and dry conditions and **NOT** where high levels of humidity and temperature are experienced.
Note: IP rating of enclosures can be compromised if correct use of glands is not followed when installing unit.