

Product Code	Product Range	Issue No.	Issue Date	Issue By
UCB1 UCB2 UCB4	U FS / S Range	C	Feb 2026	T.T.

Description

Cable spreader box for fitting top and bottom of "U" range switch-disconnector-fuse and switch-disconnectors.

For top or bottom fitment.



General Characteristics


Standards	BS EN 60947-1
Enclosure	1.2mm mild steel case.
Finish	RAL, matt 7035. Paint finish electrostatically applied.
IP Rating	3X
Cable entry facility	Blank removable steel gland plate which is fitted to the "U" range switch-disconnector-fuse & switch-disconnectors. Refit on cable box.
Equipment type.	Fixed stationary
Weight: UCB1	3.28 kg
UCB2	4.25 kg
UCB4	5.43 kg

Order ref:


UCB1	For U63FS / S to U160FS / S, 3 & 4 pole
UCB2	For U200FS / S to U315FS / S, 3 & 4 pole
UCB4	For U400FS / S, 3 & 4 pole

Dimensions.


UCB1

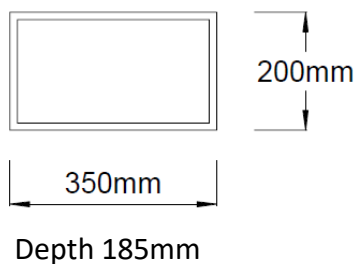

UCB2

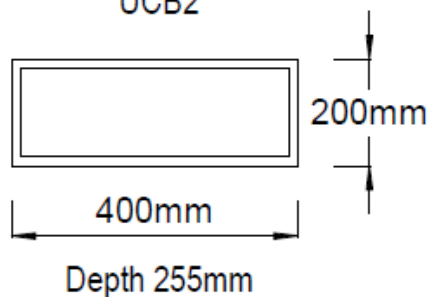

UCB4

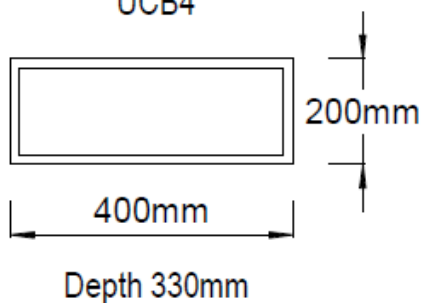

Additional information

Usage	Intended for use by skilled persons or instructed persons. The end plate fitted to the “U” range switchgear is to be removed and refitted to the end of the cable box. The cable box is bolted to the switch using the existing holes & bolts.
Electrical	EMC environment: Environment type A.
Installation	Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use, dry conditions and NOT where high levels of humidity and temperature are experienced.