

Product Data Sheet



Product Code: **MCEL315F**

Issue No.

B

Issue Date:

10 /12 /2018

Issue by:

T. Tombs

Description

315A 4P MCCB with bolted neutral link.
Type A filtered earth leakage relay, voltage dependent, mounted in a mild steel enclosure.

General Characteristics

Standards.	BS EN60947-1 & 2. IEC 60755, IEC 62020, IEC 61543.
Current rating.	315A
Voltage rating.	230 / 400V ac. 50/60Hz.
Fault current rating	36kA.
Enclosure. Dimensions	Mild steel to IP3X. 950mmH x 400mmW x 170mmD.
Finish	Matt grey to RAL 7035, Electrostatically applied.
IP Rating.	3X
No of poles.	4 switched.
Terminal capacity.	Phases – M12 bolt. Neutral – M12 bolt.
Terminal tightening torque.	Mccb – 50Nm. Neutral – 50Nm.
Cable entry facility.	Plain plate top and bottom. Drill to suit on site.
Covers / Door.	Front bolt on cover.
Earth leakage relay settings. True RMS sensing. Adjustable.	Milli amp – 30, 100, 300, 500. Amps – 1, 3, 5, 10, 20, 30. Time – ms 0, 60, 150, 250, 500, 800. Sec – 1, 2.5, 5, 10.
E/L CT diameter.	120mm internal diameter.
Equipment type.	Fixed stationary
Weight.	29 kg

Switchgear Fitted


Device	Rating
MC315FA Earth Leakage relay and CT	315A

MCCB:

For full technical details of the mccb request MCCB data sheet.

Accessories.

Padlock device: Part no. **MCPD** (padlock not supplied).

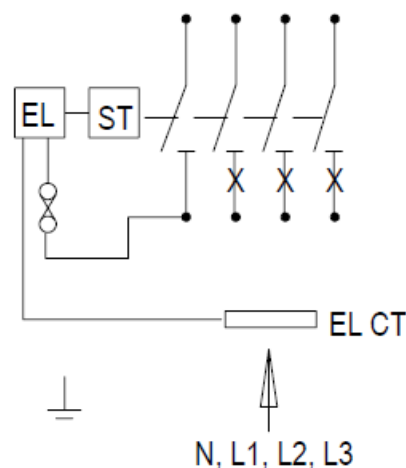

Minimum sensitivity $I_{\Delta n} - 0.1 \text{ A}$
It is intended that this device is under the
supervision of an instructed or skilled
person.
BS7671:2018 clause 531.3.4.2

Product Data Sheet



Product Code: **MCEL315F**

Issue No.

Issue Date:

Issue by:

B

10 /12 /2018

T. Tombs




Description

250A 3P MCCB with bolted neutral link.

Type A filtered earth leakage relay, voltage dependent, mounted in a mild steel enclosure.

Key Dimensions

Mounting hole positions

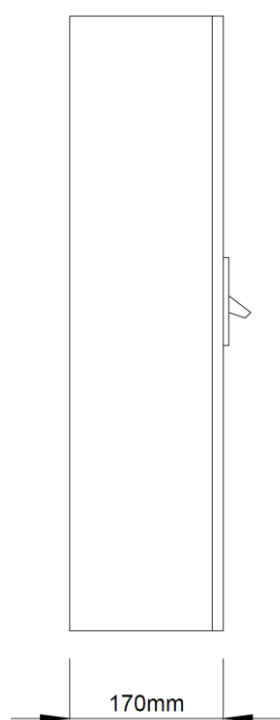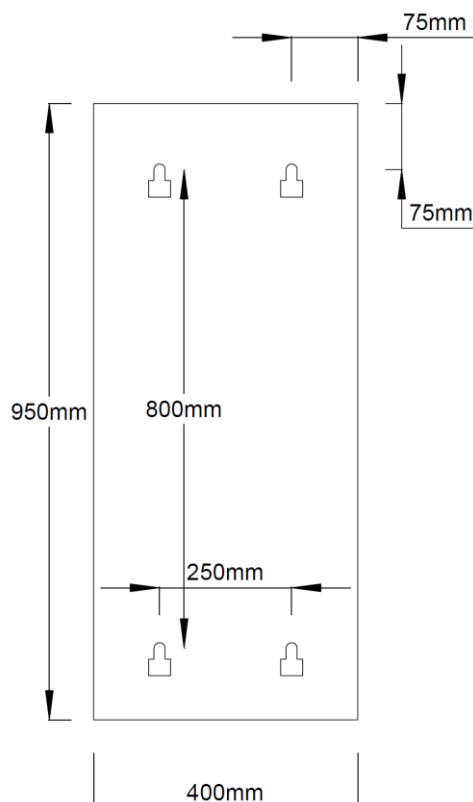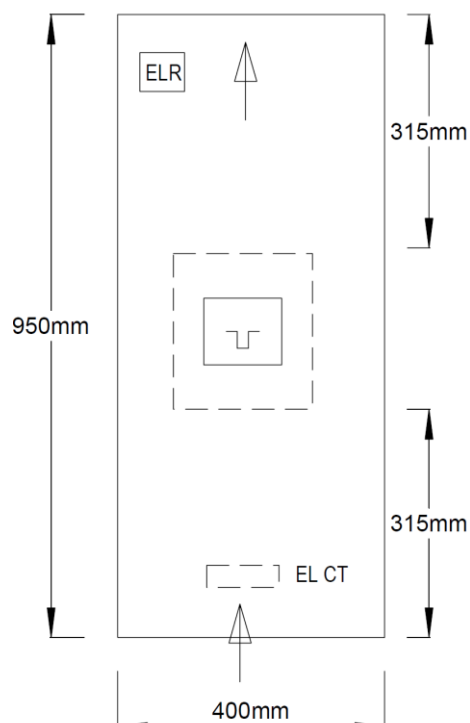

Additional information.

Usage

Intended for use by skilled persons or instructed persons.

Electrical

Earth terminal : Earth bolt M10.

Rated frequency: 50Hz.

Rated operational voltage: 400V

Rated insulation voltage: 750V.

Earthing system:

EMC environment: Environment type A.

Physical

Ambient operating temperature -5 to 40 °C

(Not exceeding average of 35 °C in any 24 hour period).

Maximum altitude 2000m.

Earth Leakage relay

Power on LED.

Earth leakage indication displayed in LED array (% leakage of setting).

Installation

Service conditions: Wiring of this product must comply with current IEE regulations. Units are intended for indoor use and dry conditions and **NOT** where high levels of humidity and temperature are experienced.

Note: IP rating of enclosures can be compromised if correct use of glands is not followed when installing unit.