
Proteus Data Sheet

Product Code	Product Range	Issue No.	Issue Date	Issue By
OPSPDT2S2	Proteus EV	A	06-06-2022	T.T.

Description

Type 2 surge arrestor kit for fitting to 200A OPBX range distribution boards.

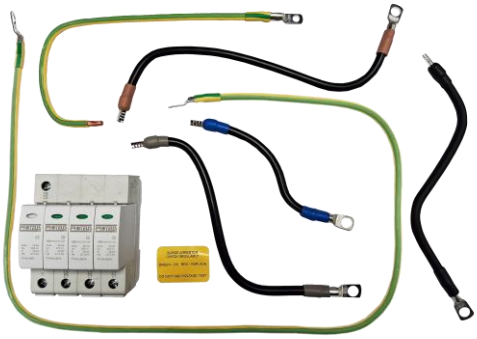

Features

Can be fitted at time of manufacture or on site by electrically competent personnel.
Visual flag indication of SPD status.
Plug in modules.

General Characteristics

Standards	SPD – EN61643-11
Approx. weight SPD - kg	0.4
Cable connection	Direct connection to main switch disconnector terminals.

Protection parameters.

Imax.	40kA 8/20 µs.
In 20x.	20kA 8/20 µs.

Remove terminal bolts from top of main switch disconnect. Clip the SPD to the DIN rail, top right. Connect supplied cables between switch disconnector and SPD. Fit the supplied earth cable.
Fitting instructions provided.
For full SPD specification request data sheet SPD/T2/4P.



Proteus | Stafford Park 12 | Telford | Shropshire | TF3 3BJ
T: 01952 292001 **E:** ind@proteusswitchgear.co.uk **W:** www.proteusswitchgear.co.uk