


PROTON, SURFACE MOUNTED ADJUSTABLE PIR

500W, IP66

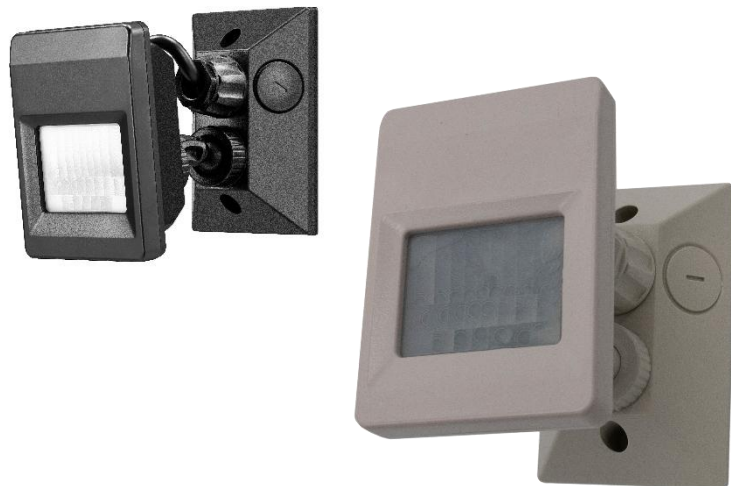

PRODUCT INFORMATION DOCUMENT

CONSTRUCTION


- ABS housing with polycarbonate sensor cover
- Silicone cable entry gasket
- 3 Way screw terminal

FEATURES

- Suitable for surface indoor and outdoor applications
- Can be either wall or ceiling mounted
- 3-wire version allowing for continuity of neutral in the circuit
- Maximum LED load of 500W, 1000W fluorescent, 2000W resistive




WARRANTY



IP RATING




IK RATING



180°



90°




OPERATING
VOLTAGE



SAFETY
CLASS

Product Code:	
Black	R110PIR3WM-04
Grey	R110PIR3WM-24
Maximum LED Load (W):	500
Standby Power (W):	0.5
Holding Times:	10sec to 30min
Lux Switching Levels (lux):	2lx to 2000lx
Detection Angle (deg):	120
Tilt Angle (deg):	90
Rotation Angle (deg):	180
Detection Zone (m):	18
IP:	66
Operation Temperature (°C)	-20 ≤ Ta ≤ +40
Dimensions LxWxH	135x77x115
Weight (kg):	

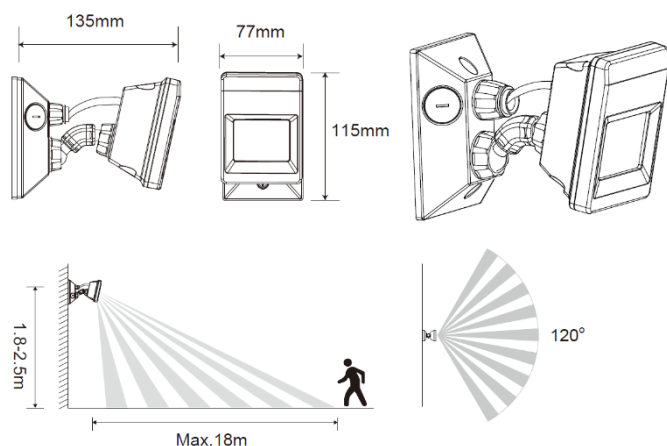

Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROB.US.COM
WEB: ROB.US.COM
WEB: ROB.US.COM.AU
WEB: ROB.USLED.CO.NZ

LED GROUP EUROPE · UK · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA