

Product Specification



LED Flood Light SparX-XL Watt Select



Product Features

- Watt Select (120w/150w/200w)
- 3 colour adjustable (3000K/4000K/5000K)
- Aluminium die cast housing
- Tempered glass face
- 120° Beam Angle
- 420 x 350 x 55mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 3.7kg

Specification Overview



WATT SELECT



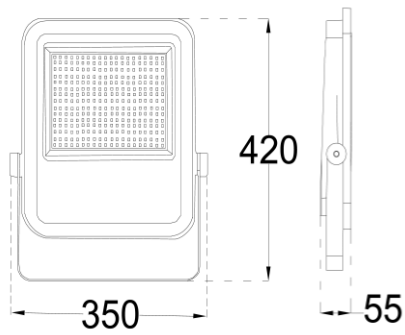
COLOUR SELECT



Model	Power	Dimensions	Colour Temp	Lumens	Beam Angle	Trim Colour	Weight
FL-SPX-XL	120w/150w/200w	420 x 350 x 55mm	3000/4000/5000K	13,200-22,000lm	120°	Black	3.7g

LED Flood Light SparX-XL Watt Select

Model	Trim Colour	Power	Lumens	CCT	Dimension	Weight
FL-SPX-XL	Black	120w	14,400lm	3000K/4000K/5000K	420 x 350 x 55mm	3.7kg
		150w	18,000lm			
		200w	22,000lm			

Specification				Dimensions	
CCT	3000K/4000K/5000K	Earth Leakage	0.7mA		
Efficacy	>120lm/w	Surge Protection (L-N/L-E)	L-N 2.5 KV LN-PE 1KV		
CRI (%)	≥80	Dimmable	No		
Beam Angle	120°	Housing	Diecast aluminium with toughened glass lens		
Power Input	220~240VAC	Housing Colour	Black		
Max. Line Current	1000mA	Lifespan	>40,000 hours		
Inrush Current	1500mA	Operation Temperature	-20°C~+45°C		
Inrush Duration (@50%)	80mS	Warranty	3 Years		

Specifications are subject to change without notice