

Product Specification



G2 Surface Mount Batten
4FT Emergency



Product Features

- Maintained Emergency Fitting
- 4FT (1200mm)
- 36w, 30w, 20w selectable
- 3 Colour Adjustable (4000K/5000K/6000K)
- Steel Base with PC Lens
- 120° Beam Angle
- IP20 Housing
- IK08 Impact Rating
- Weight: 1.6kg

Options:

-  Standard Fitting
-  Dimmable Fitting
-  Motion Sensor Fitting
-  Sensor and Emergency Fitting

Specification Overview



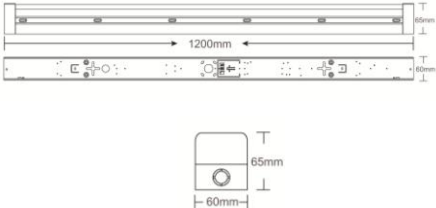
Model	Power	Input	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
SMD-4FT-3C-E	36w/30w/20w	220~240VAC	4000K/ 5000K/6000K	4140~4533lm (36w)	120°	White	1200x60x65mm

G2 Surface Mount Batten

4FT Emergency

Model	Power	Lumens	CCT	Dimension (L x W x H)	Weight
-------	-------	--------	-----	--------------------------	--------

SMD-4FT-3C-E	36w-30w-20w	4140~4533lm (36w)	4000K/5000K/6000K	1200 x 60 x 65mm	1.6kg
--------------	-------------	----------------------	-------------------	------------------	-------

Specification				Dimensions
CCT	4000K/5000K/6000K (selectable)	Housing	Steel	
Efficacy	>115lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	White	
Beam Angle	120°	Lifespan	>54,000 hours	
Power Input	220~240VAC	Operation Temperature	-20 °C to +45°C	
Dimmable	No	Motion Sensor	No	
Impact Rating	IK08	Emergency	5w, 90 min run-time	
Protection Rating	IP20	Warranty	5 Years Light, 3 Years Battery	