
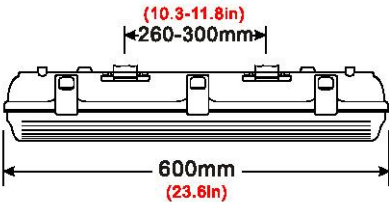


G3 Weatherproof Batten
2FT Standard

Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
WP-2FTG3-3C	10w/20w	1975~2206lm (20w) 987~1103lm (10w)	4000K/5000K/6000K	600 x 95 x 80mm	820g

Specification				Dimensions
CCT	4000K/5000K/6000K (selectable)	Housing	Polycarbonate	
Efficacy	>101lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Grey	
Beam Angle	110°	Lifespan	>54,000 hours	
Power Input	200~240VAC	Operation Temperature	-20 °C to +50°C	
Dimmable	No	Motion Sensor	No	
Impact Rating	IK08			
Protection Rating	IP65	Warranty	5 Years	





Pole Bracket Kit

Model: WP-G3-PB

G3 Weatherproof Batten
2FT Emergency



Model	Power	Lumens	CCT	Dimension (W x H x D)	Weight
WP-2FTG3-3C-E	10w/20w	1975~2206lm (20w) 987~1103lm (10w)	4000K/5000K/6000K	600 x 95 x 80mm	1.3kg

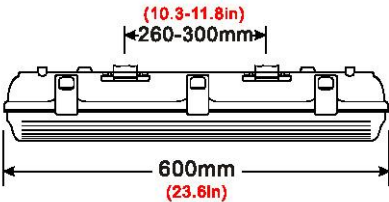Specification				Dimensions
CCT	4000K/5000K/6000K (selectable)	Housing	Polycarbonate	
Efficacy	>101lm/w	Lens	Polycarbonate	
CRI (%)	≥80	Housing Colour	Grey	
Beam Angle	110°	Lifespan	>54,000 hours	
Power Input	200~240VAC	Operation Temperature	-20 °C to +50°C	
Dimmable	No	Emergency	5w, 90 min run-time	
Impact Rating	IK08	Type	Maintained or Non-Maintained	
Protection Rating	IP65	Warranty	5 Years Light, 3 Years Battery	



Pole Bracket Kit
Model: WP-G3-PB