



G4 SERIES G4L15 - 1.5W


1.5 watt LED G4 base lamp

Application

Energy efficient LED lamp solutions designed for G4 base luminaires

Design Specifications

- Transparent silicone body
- 12V AC or DC driver required
- High efficiency SMD LED chips
- Colour temperatures 3000K, 6000K, CRI > 80
- Wide beam angle 270 degree
- Compatible with most electronic transformers, suits most G4 lamp fittings

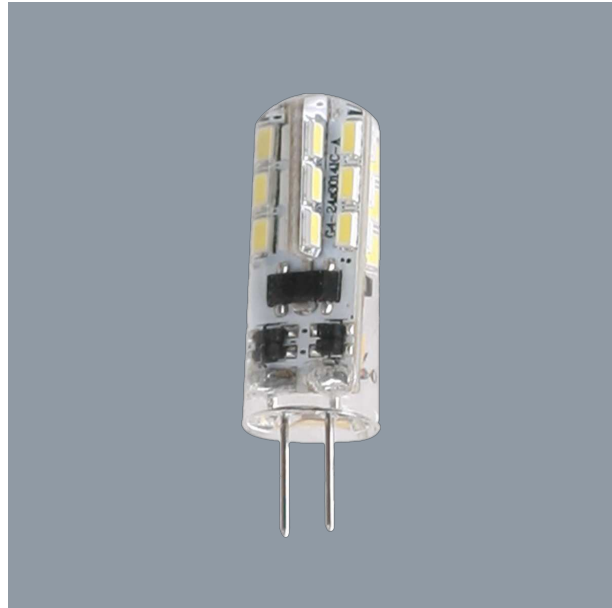

Technical Specification

Model No.	Input Voltage (V/AC)	Input Voltage (V/DC)	Power (W)	Lumens (lm)	CCT (K)	CRI
G4L15WW	12	12	1.5	90	3000	80
G4L15DL	12	12	1.5	100	6000	80


Model No.	Beam Angle (°)	Dimmable	Diameter (mm)	Height (mm)	Base Type
G4L15WW	120	NO	9.5	34	G4
G4L15DL	120	NO	9.5	34	G4

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

G4L15

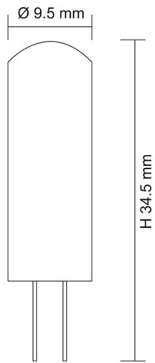

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
UNIFIT SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

