



## G4 BASE G4L25 - 2.5W


2.5 watt LED G4 lamp

### Application

Energy efficient LED lamp solutions, designed for G4 base luminaires

### Design Specifications

- Transparent silicone body
- 12V AC or DC driver required
- High efficiency SMD LED chips
- Colour temperature choice of 3000K or 6000K
- Wide beam angle, 270 degree
- Compatible with most electronic transformers, suits most G4 lamp fittings

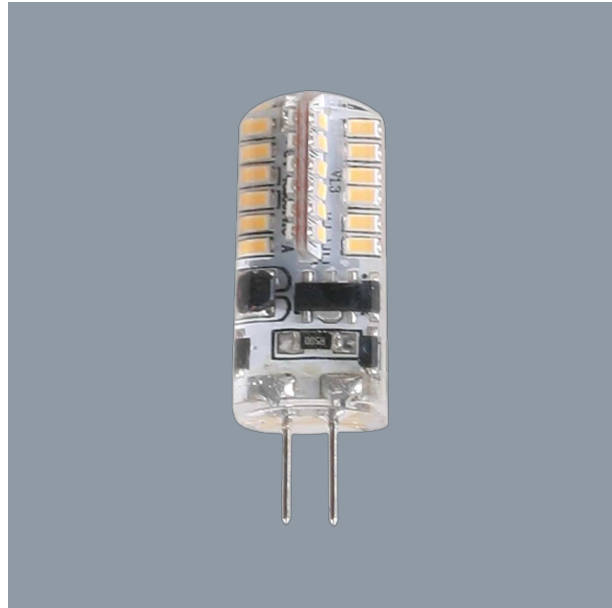

### Technical Specification

Model No.	Input Voltage (V/AC)	Input Voltage (V/DC)	Power (W)	Lumens (lm)	CCT (K)	CRI
G4L25WW	12	12	2.5	160	3000	80
G4L25DL	12	12	2.5	180	6000	80


Model No.	Beam Angle (°)	Dimmable	Diameter (mm)	Height (mm)	Base Type
G4L25WW	270	NO	13	37	G4
G4L25DL	270	NO	13	37	G4

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



## Dimensions

G4L25

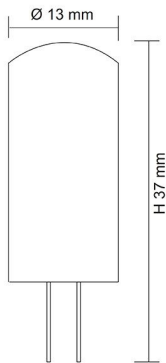

# THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY  
MATCH THE  
UNIFIT SFI  
DOWNLIGHT  
WITH THIS  
SDD400SFI  
DIMMER.**



**DIM with  
FLICKER  
CONTROL**

For related  
products  
please  
scan me

