



G9L - 2.5W

G9 base designed to suit most G9 luminaires

Application

G9L LED lamp, 2.5 watt ideal for feature lighting

Design Specifications

- Opal polycarbonate body profile
- High efficiency SMD LED chips, CRI>80
- 320° optical distribution
- Colour temperature, choice of 3000K/6000K
- Double insulation



Technical Specification

| Model No. | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K) | CRI | Beam Angle (°) |
|-----------|----------------------|-----------|-------------|---------|-----|----------------|
| G9L3D/WW | 240 | 2.5 | 200 | 3000 | 80 | 320 |
| G9L3D/DL | 240 | 2.5 | 220 | 6000 | 80 | 320 |


| Model No. | Base Type |
|-----------|-----------|
| G9L3D/WW | G9 |
| G9L3D/DL | G9 |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

G9L

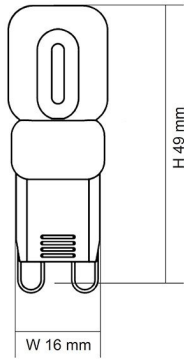

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
UNIFIT SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

