



CANDLE CLEAR DIMMABLE LCA D/C - 4W

4 watt dimmable LED filament candle style clear lamps

Application

Energy efficient LED lamp solutions

Design Specifications

- Clear glass diffuser, SES, SBC, ES or BC base
- High efficiency LED filament, CRI >80
- Integral trailing edge dimmable LED driver
- 320° beam distribution
- CCT choice of 2700K / 5000K, CRI > 80
- 1:1 size to traditional candle lamp, dimmable, suits most candle lamp fittings









Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**





Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	LCA27B15D/C	240	4	450	2700	80
	LCA27B22D/C	240	4	450	2700	80
	LCA27E14D/C	240	4	450	2700	80
	LCA27E27D/C	240	4	450	2700	80
	LCA50B15D/C	240	4	450	5000	80
	LCA50B22D/C	240	4	450	5000	80
	LCA50E14D/C	240	4	450	5000	80
	LCA50E27D/C	240	4	450	5000	80


Beam Angle (°)	Dimmable	Diameter (mm)	Length (mm)	Base Type
320	YES	37	95	B15
320	YES	37	91	B22
320	YES	37	97	E14
320	YES	37	92	E27
320	YES	37	95	B15
320	YES	37	91	B22
320	YES	37	97	E14
320	YES	37	92	E27

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".




Dimensions


LCA B15

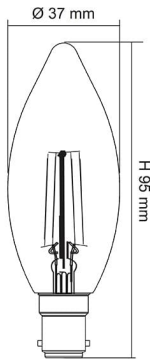

LCA B22



LCA E14

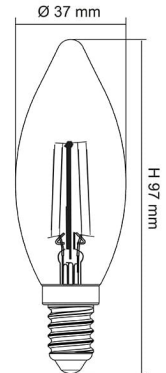

LCA E27

