



DUAL RELAY CONTROL PC206DR/R/BTAM


Australian approved signal control

Application

Designed for high or low power switch control

Design Specifications

- Compact design profile
- Double insulation
- Two channel relays, switching ON / OFF functions
- 6A per channel.
- No minimum load required for low power, dual LED indicators to display the individual channel operating status
- Optional Memory function to recall prior operating status, in the event of power outage, integral CH1 and CH2 control buttons for easy commissioning.

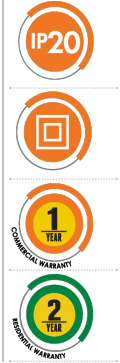


Technical Specification

Product	Model No.	Body Colour	Dim (mm)
	PC206DR/R/BTAM	WHITE	110(L) x 40(W) x 26(H)


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Buttons and terminals

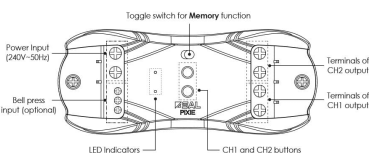

Wiring diagram (Typical application)

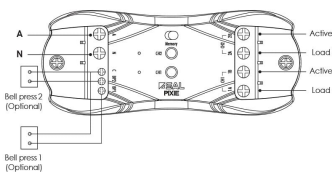

THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

