



WAVE S9065TC/MP/S - 9W

Recessed 9 watt multi-power LED downlight, with microwave sensor control and selectable CCT

Application

Ideal for any residential or strata common area interior spaces

Design Specifications

- Selectable power, CCT 3000K/4000K/5700K and integral microwave sensor
- Poly covered aluminium body
- Opal polycarbonate diffuser, IP44
- Integral multi-power (3/6/9 watt) flickerCONTROLLED non-dimmable LED driver, with flex and plug
- Microwave sensor adjustments
- 5sec/90sec/5min/30min, daylight threshold 30 lux , detection distances Ø 8M @ 2.4hm, manual override function
- Deco ring options - Satin Nickel (S9065SN/RING), Black (S9065BK/RING)
IC - 4 rated, double insulated






Performance

- Dimmable - **NO**
- In Built Sensor - **YES**
- Sensor Type - **MICROWAVE**





Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9065TC/MP/S	240	9	700/850/800	3000/4000/5700	120
	S9065SN/RING					
	S9065BK/RING					

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
NO	90	WHITE	92	113	59(H)
	90	SATIN NICKEL			
	90	BLACK			

Note: Lumens (lm) displayed are at full power

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

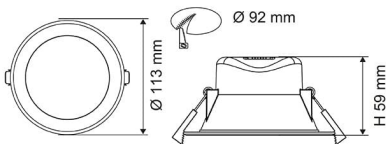



Photometric Data

Unit: cd C0/C180 — C90/C270 —

