



WAVE flickerGUARD S9065TC FG - 8W

Dimmable 8 watt LED downlight, CRI90 with selectable CCT and flickerGUARD

Application

Ideal for any residential or commercial interior space, experiencing nuisance harmonic induced flicker

Design Specifications

- The innovative WAVE flickerGUARD responds to both visual and non-visual harmonic induced flicker.
- Selectable CCT 3000K / 4000K / 5700K, CRI90
- Integral flickerGUARD trailing edge dimmable LED driver, with smooth dimming performance, designed with flex and plug for easy installation.
- Poly covered aluminium body
- Deco ring options: Satin Nickel (S9065SN/RING), Black (S9065BK/RING)
- IC - 4 rated, double insulated



Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9065TC/WH/FG	240	8	800/950/850	3000/4000/5700	90
	S9065SN/RING					
	S9065BK/RING					



Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
YES	90	WHITE	92	113	59(H)
	90	SATIN NICKEL			
	90	BLACK			

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

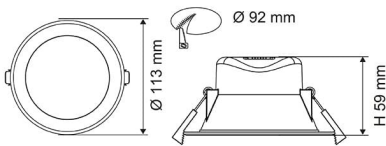

Photometric Data

Unit: cd C0/C180 — C90/C270 —

