



STARGEM II SES7060 - 20W

2 x 10 watt IP54 wall mount LED flood light, with sensor

Application

A versatile security solution for residential exterior spaces

Design Specifications

- Independently adjustable heads
- Robust polycarbonate base
- Opal polycarbonate diffuser, beam distribution 100 degree
- High efficiency SMD LED chips, non-dimmable LED driver
- Integral infrared motion sensor with override function. To enable 'Manual Override' or 'Permanent On', simply switch off and on twice within six seconds. The lights will now stay on permanently. To return to 'Automatic Mode', switch the unit off and after ten seconds switch on again. The unit will resume normal operation.
- Installation height: 1.5-3.5 m, Double insulation



Performance

In Built Sensor - **YES**
Sensor Type - **PIR**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SES7060NDL/BK	240	20	1600	5000	80	180

Model No.	Body Colour	Dim (mm)
SES7060NDL/BK	BLACK	204(L) x 165(W)


* Lumens shown are TOTAL luminaire Lumen (lm).

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Sensor Specifications

Power Source	Power	Detection Range	Detection Angle	Detection Motion Speed	Working Temperature	Time Setting	Lux Threshold
24V 50Hz	0.45W (idle 0.1W)	3.2m @ 2.5m height	180°	0.6-1.5 m/s	-10-40°C	10s-4min	10-2000 Lux

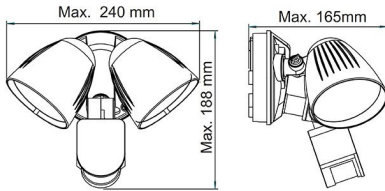

POWERSTAR SE7100/600 - 600W



Before selecting a floodlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance.

In addition look out for limits in aiming orientation to ensure the floodlight operates within its design limits and to ensure the product is suitable for such an application.

*Need more information on AS/NZS 60598 safety and compliance?
Check out the SAL web FAQ's or speak to your local SAL team member.*

For related
products
please
scan me

