



UFO III SHB27S - 100/150/200W

1-10V Dimmable, IP66 LED super low profile LED highbay

Application

Ideal for any commercial or industrial interior spaces

Design Specifications

- Die-cast aluminium body, super low profile design
- Black powder coated finish
- High efficiency LED optics, clear polycarbonate lens, 90° beam distribution
- Optional plug and play motion and daylight harvesting sensor available (SHB2X/CS and remote control SHB2XS/RC)
- Integral 1-10V dimmable LED driver with surge protection, complete with flex and plug for easy installation
- Robust design IP66 and IK08 rated









NEED A HAND
PACKING YOUR
PRODUCT DATA
SHEETS?
GIVE THE SAL
SHOPPING CART
A GO.

Performance

- Dimmable - **YES**
- Dimmer Type - **1-10V, optional SAL DALI (1) addressable signal converter**
- In Built Sensor - **OPTIONAL**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	Beam Angle (°)	CCT (K)
	SHB27S100NDL	240	100	15000	90	5000
	SHB27S150NDL	240	150	22500	90	5000
	SHB27S200NDL	240	200	30000	90	5000
	SHB27S/150PLB					
	SHB27S/200PLB					
	LF-SAD010B					

CRI	Body Colour	Diameter (mm)	Dim (mm)	Mass (kg)	IPART
80	BLACK	260	129(H)	1.5	
80	BLACK	289	129(H)	1.8	
80	BLACK	328	129(H)	2.4	
	BLACK		220(W) x 185(H)		N/A
	BLACK		250(W) x 185(H)		N/A
	DALI SIGNAL CONVERTER			0.06	


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

100W

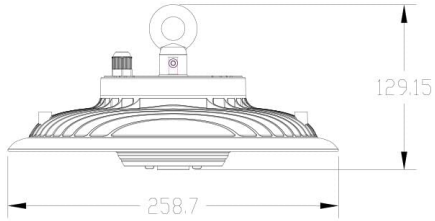

150W

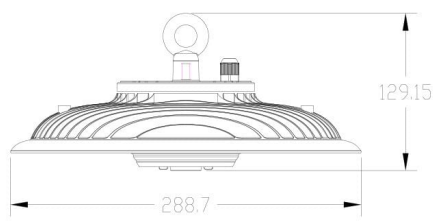

200W

