



SLIMLINE SEAMLESS TC LINKABLE SL9706 - 4/22W


TC SEAMLESS SLIMLINE

Application





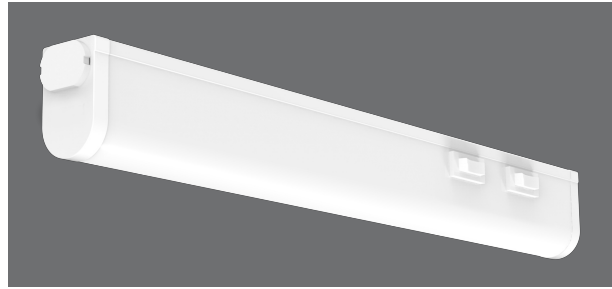


Great for commercial shop spaces, home pantries, walk-in wardrobes

Design Specifications

- Selectable CCT 3000K, 4000K, 5500K, beam distribution 105 degree, CRI > 80
- Polycarbonate body profile and opal diffuser
- Integral constant current non-dimmable driver
- Individual switch control, plug and play flex and plug included
- Maximum connections: 280TC x 55, 540TC x 25, 840TC x 17, 1140TC x 12, 1440TC x 10 UNITS, Maximum mixed connections 240W
- Accessories: SL9706/32CM LINK (L 320mm)
SL9706/76CM LINK (L 760 mm)



Technical Specification




Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL9706/280TC	240	4	350/400/350	3000/4000/5500	80
	SL9706/540TC	240	9	850/1050/900	3000/4000/5500	80
	SL9706/840TC	240	13	1300/1500/1400	3000/4000/5500	80
	SL9706/1140TC	240	18	1800/2100/1850	3000/4000/5500	80
	SL9706/1440TC	240	22	2150/2450/2200	3000/4000/5500	80
	SL9706/32CM	240				
	SL9706/76CM	240				

Beam Angle (°)	Dim (mm)	Body Colour	VEET
105	280(L) x 23(W) x 36(H)	WHITE	
105	540(L) x 23(W) x 36(H)	WHITE	
105	840(L) x 23(W) x 36(H)	WHITE	YES
105	1140(L) x 23(W) x 36(H)	WHITE	YES
105	1440(L) x 23(W) x 36(H)	WHITE	YES
	320(L)	WHITE	
	760(L)	WHITE	

IMPORTANT, where CCT selection switching is provided, it is important to switch OFF the SUPPLY before the CCT selection is made, otherwise equipment damage may occur.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

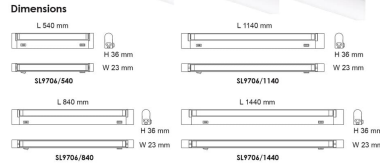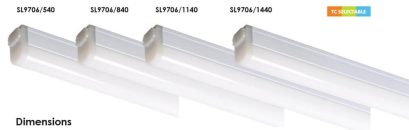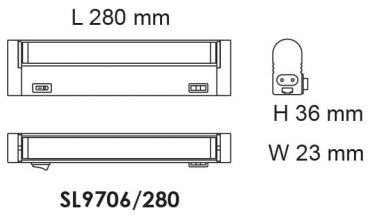

Maximum connections
Mixed connections maximum 240W

SL9706/280TC	1 2 3 4...	55pcs
SL9706/540TC	1 2 3 4...	25pcs
SL9706/840TC	1 2 3 4...	17pcs
SL9706/1140TC	1 2 3 4...	12pcs
SL9706/1440TC	1 2 3 4...	10pcs