

Product datasheet

Specifications



Modular 1 phase current Control Relay, Harmony Control Relays, 5 A, 2 CO, 0.15...15 A , 24...240 V AC/DC

RM35JA32MW

Main

| | |
|---------------------------------|---|
| Range of product | Harmony Control Relays |
| Relay type | Current control relay |
| Product or component type | Current control relay |
| Relay name | RM35JA |
| Relay monitored parameters | Overcurrent or undercurrent detection |
| time delay | Adjustable 0.3...30 s, 0 + 10 % Tt- time delay upon fault Adjustable 1...20 s, 0 + 10 % Ti- inhibition time delay upon startup |
| Switching capacity in VA | 1250 VA |
| Minimum switching current | 10 mA at 5 V DC |
| Maximum switching current | 5 A AC/DC |
| Maximum power consumption in VA | 3.5 VA AC |
| Measurement range | 150 mA...15 A current AC/DC |
| Utilisation category | AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1 DC-14 conforming to IEC 60947-5-1 |
| Contacts type and composition | 2 C/O |

Complementary

| | |
|--------------------------------|--|
| Reset time | 1500 ms time delay |
| Maximum switching voltage | 250 V AC/DC |
| Supply voltage limits | 20.4...264 V AC/DC |
| operating voltage tolerance | - 15 % + 10 % Un |
| Maximum power consumption in W | 0.6 W DC |
| Control circuit frequency | 40...70 Hz +/- 10 % |
| Resistance across terminals | 0.005 Ohm at E3-M terminals 0.015 Ohm at E2-M terminals 0.05 Ohm at E1-M terminals |
| Output contacts | 2 C/O |
| Nominal output current | 5 A |
| Maximum measuring cycle | 30 ms measurement cycle as true rms value |
| Hysteresis | 5...50 % of threshold setting |

| | |
|--------------------------------------|--|
| delay at power up | 0.3 s |
| Measurement accuracy | +/- 10 % of the full scale value |
| Repeat accuracy | +/- 0.5 % for input and measurement circuit +/- 2 % for time delay |
| Measurement error | 0.05 %/°C with temperature variation 1 by volt over the whole range with voltage variation |
| Polarity | No DC |
| Threshold setting | 10...100 % |
| Marking | CE : EMC 89/336/EEC CE : 73/23/EEC |
| Overvoltage category | III conforming to IEC 60664-1 |
| Insulation resistance | > 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60255-5 > 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60664-1 > 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60255-5 > 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60664-1 > 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60255-5 > 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60664-1 |
| [UI] rated insulation voltage | 250 V conforming to IEC 60664-1 |
| Operating position | Any position without derating |
| Connections - terminals | Screw terminals, 1 x 0.5...1 x 4 mm ² (AWG 20...AWG 11) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 12) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm ² (AWG 24...AWG 16) flexible with cable end |
| Tightening torque | 0.6...1 N.m conforming to IEC 60947-1 |
| Housing material | Self-extinguishing plastic |
| Local signalling | LED (green) for power ON LED (yellow) for relay ON |
| Mounting support | 35 mm symmetrical DIN rail conforming to IEC 60715 |
| Electrical durability | 100000 cycles |
| Mechanical durability | 30000000 cycles |
| Operating rate | <= 360 operations/hour full load |
| [Un] rated nominal voltage | 24...240 V AC/DC 50/60 Hz, non self-powered |
| Safety reliability data | MTTFd = 296.8 years B10d = 270000 |
| Contacts material | Cadmium free |
| Width | 35 mm |
| Control type | Without test button |
| Net weight | 0.13 kg |

Environment

| | |
|--------------------------------------|--|
| Immunity to microbreaks | 50 ms |
| Electromagnetic compatibility | Emission standard for industrial environments conforming to IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3 Immunity for industrial environments conforming to NF EN/IEC 61000-6-2 |
| Standards | IEC 60255-6 |

| | |
|--|--|
| Product certifications | GL UL GOST C-Tick CSA |
| Ambient air temperature for storage | -40...70 °C |
| Ambient air temperature for operation | -20...50 °C |
| Relative humidity | 95 % at 55 °C conforming to IEC 60068-2-30 |
| Vibration resistance | 0.35 mm (f= 5...57.6 Hz) conforming to IEC 60068-2-6 1 gn (f= 57.6...150 Hz) conforming to IEC 60255-21-1 |
| Shock resistance | 15 gn for 11 ms conforming to IEC 60255-21-1 |
| IP degree of protection | IP20 (terminals) conforming to IEC 60529 IP30 (casing) conforming to IEC 60529 |
| Pollution degree | 3 conforming to IEC 60664-1 |
| Dielectric test voltage | 2 kV, 1 min AC 50 Hz conforming to IEC 60255-5 2 kV, 1 min AC 50 Hz conforming to IEC 60664-1 |
| Non-dissipating shock wave | 4 kV conforming to IEC 60255-5 4 kV conforming to IEC 60664-1 4 kV conforming to IEC 61000-4-5 |

Packing Units

| | |
|-------------------------------------|-----------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 4.500 cm |
| Package 1 Width | 8.000 cm |
| Package 1 Length | 9.500 cm |
| Package 1 Weight | 136.000 g |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 48 |
| Package 2 Height | 30.000 cm |
| Package 2 Width | 30.000 cm |
| Package 2 Length | 40.000 cm |
| Package 2 Weight | 7.291 kg |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty | 18 months |
|-----------------|-----------|

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

| | |
|---|----|
| Carbon footprint (kg.eq.CO2 per CR, Total Life cycle) | 58 |
|---|----|

| | |
|--------------------------|---|
| Environmental Disclosure | Product Environmental Profile |
|--------------------------|---|

Use Better

Materials and Substances

| | |
|--|-----|
| Packaging made with recycled cardboard | Yes |
|--|-----|

| | |
|--------------------------------------|-----|
| Packaging without single use plastic | Yes |
|--------------------------------------|-----|

| | |
|-------------------|--|
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
|-------------------|--|

| | |
|-------------|--------------------------------------|
| SCIP Number | 5e3fdf99-611b-4d07-ad17-6eba84ab488b |
|-------------|--------------------------------------|

| | |
|------------------|-----------------------------------|
| REACH Regulation | REACH Declaration |
|------------------|-----------------------------------|

| | |
|-----------------------|--|
| China RoHS Regulation | China RoHS declaration |
|-----------------------|--|

Use Again

Repack and remanufacture

WEEE



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Take-back

No

Dimensions Drawings

Current Control Relays


Dimensions and Mounting

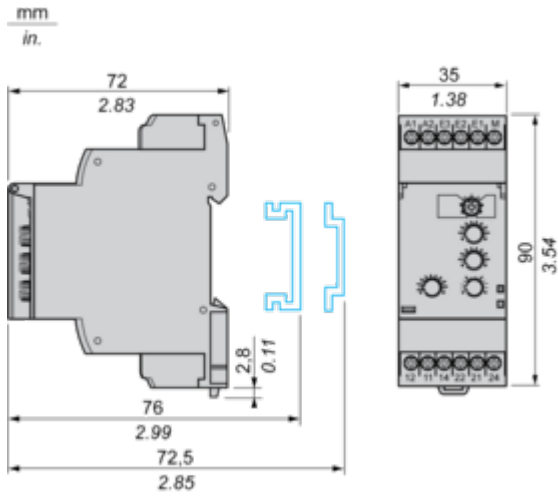

Connections and Schema

Current Control Relays


Wiring Diagram




Application Schemes

Example: Detection of Jamming on a Crusher (Overcurrent Function)

Current measured ≤ 15 A

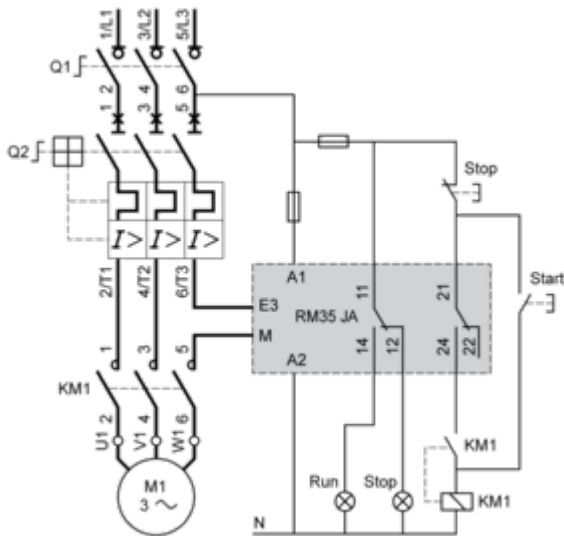

Current measured > 15 A

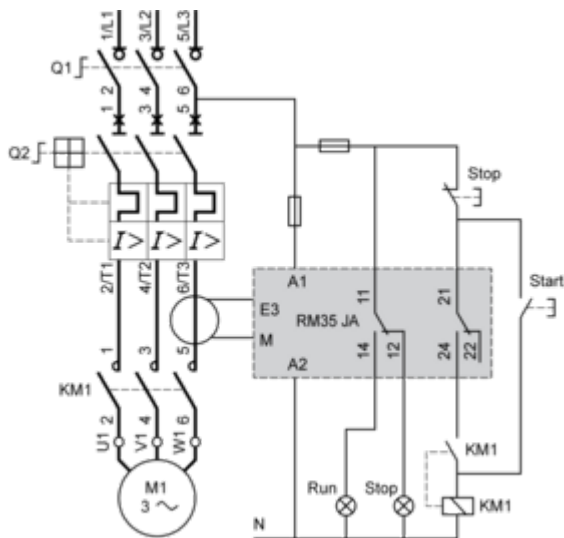


Technical Description


Function Diagrams

Undercurrent Detection

Without memory ("No Memory" mode)

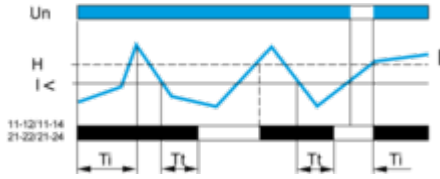


With memory ("Memory" mode)

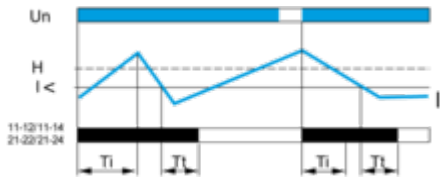


Overcurrent Detection

Without memory ("No Memory" mode)

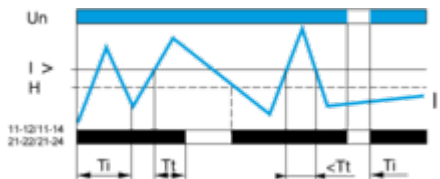

With memory ("Memory" mode)

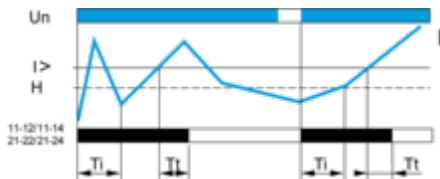

Legend

- Ti Starting inhibition time delay
- Tt Time delay after crossing of threshold
- Un Supply voltage
- I Monitored current
- H Hysteresis
- I> Overcurrent threshold
- I< Undercurrent threshold
- 11-12/11-14, 21-22/21-24 Output relay connections
- Relay status: black color = energized.

NOTE: In "Memory" mode, the relay opens when crossing of the threshold is detected and then stays in that position. The power supply voltage must be switched off to reset the product.

Technical Illustration

Dimensions

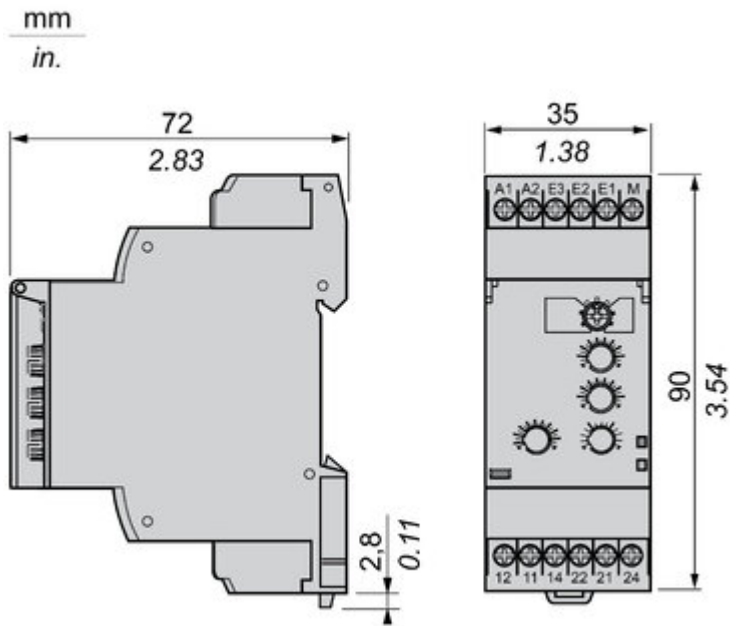


Image of product / Alternate images

Alternative





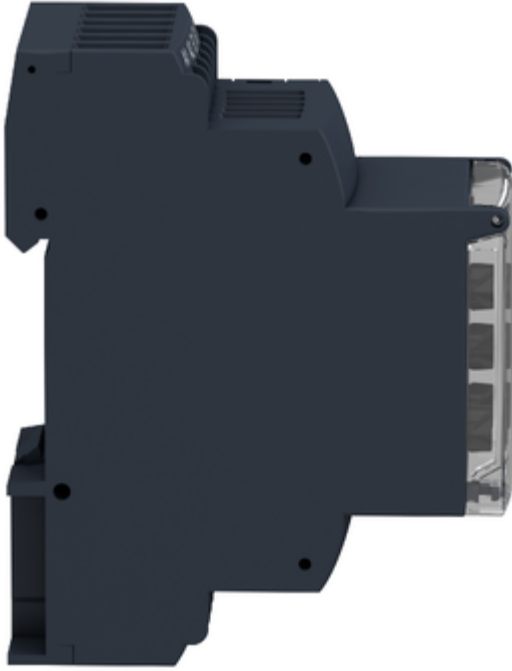


Image of product in real life situation

