

Product datasheet

Specifications



Multisound siren, Harmony XVS,
prewired, white colour, 0...105dB,
43tones, 12...24V DC

XVS14BMW

Main

Range of product	Harmony XVS
Product or component type	Multisound siren
Device short name	XVS

Complementary

Colour	White
Material	ASA (Acrylonitrile Styrene Acrylate): front ASA (Acrylonitrile Styrene Acrylate): back PC (polycarbonate): back cover
Net weight	1 kg
Marking	CE
Mounting support	Bracket
Fixing mode	3 holes Ø 9 mm
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	350 mA at 24 V 250 mA at 12 V
Electrical connection	Cable: 6.5...8.5 mm, 0.33 mm ² / AWG 22 (signalling circuit) Cable: 6.5...8.5 mm, 0.52 mm ² / AWG 20 (power circuit)
Width	140 mm
Height	114 mm
Depth	223 mm

Environment

Signalling type	43 tones siren
Standards	IEC 61000-6-2 EN 55014-2 EN 55022 IEC 61000-6-3
Product certifications	UL
Protective treatment	TC
Ambient air temperature for storage	-35...70 °C
Ambient air temperature for operation	-10...50 °C
Overvoltage category	Class II conforming to IEC 61140
IP degree of protection	IP53 conforming to IEC 60529

[Us] rated supply voltage	12 V DC 24 V DC
---------------------------	--------------------

Noise level	0...105 dB (continuous or intermittent tone) at 1 m
-------------	---

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
------------------------------	---

Package 1 Height	27.500 cm
------------------	-----------

Package 1 Width	16.000 cm
-----------------	-----------

Package 1 Length	16.000 cm
------------------	-----------

Package 1 Weight	1.340 kg
------------------	----------

Unit Type of Package 2	S04
------------------------	-----

Number of Units in Package 2	6
------------------------------	---

Package 2 Height	30.000 cm
------------------	-----------

Package 2 Width	40.000 cm
-----------------	-----------

Package 2 Length	60.000 cm
------------------	-----------

Package 2 Weight	9.302 kg
------------------	----------

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[How this information helps you >](#)

Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	13
---	----

Environmental Disclosure	Product Environmental Profile
--------------------------	---

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
--	----

Packaging without single use plastic	No
--------------------------------------	----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-------------------	--

China RoHS Regulation	China RoHS declaration
-----------------------	--

Use Again

Repack and remanufacture


Circularity Profile	End of Life Information
---------------------	---

Take-back	No
-----------	----

Dimensions Drawings

Siren

Dimensions

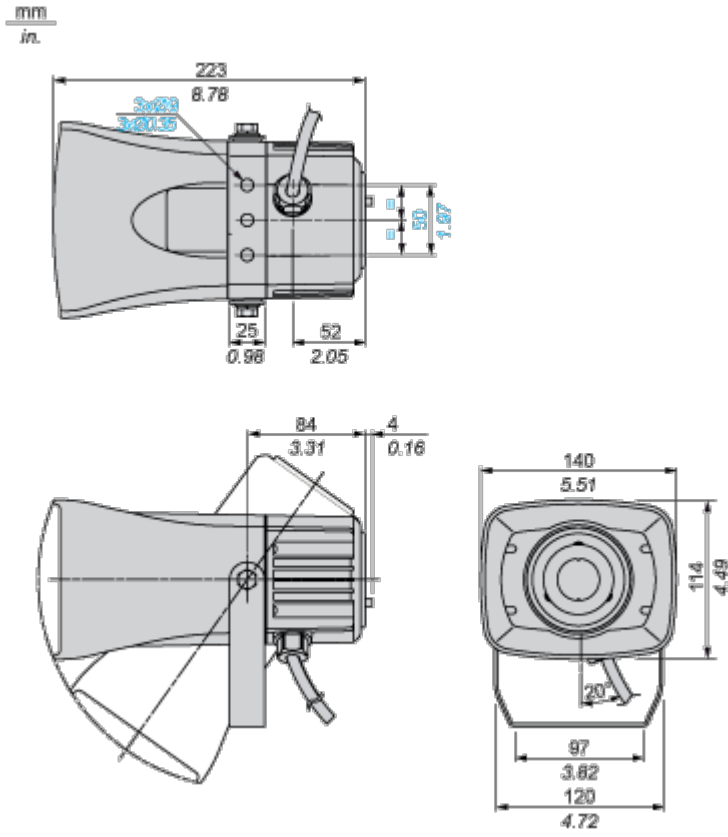

Technical Illustration

Dimensions

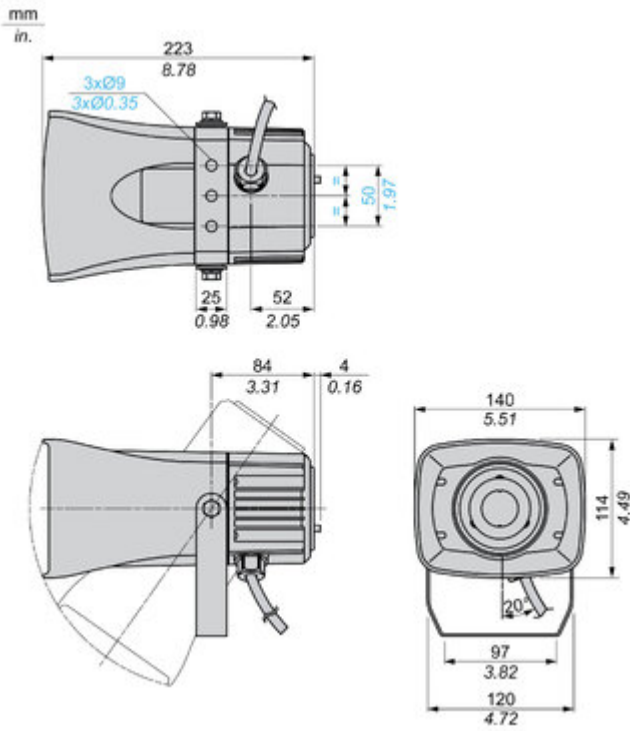


Image of product / Alternate images

Alternative

