


SPECIFICATION SHEET

Product Code	CT202C
---------------------	---------------

Description	250V~ 20A 4 Pin Connector (Screw Cable Clamps)
--------------------	---

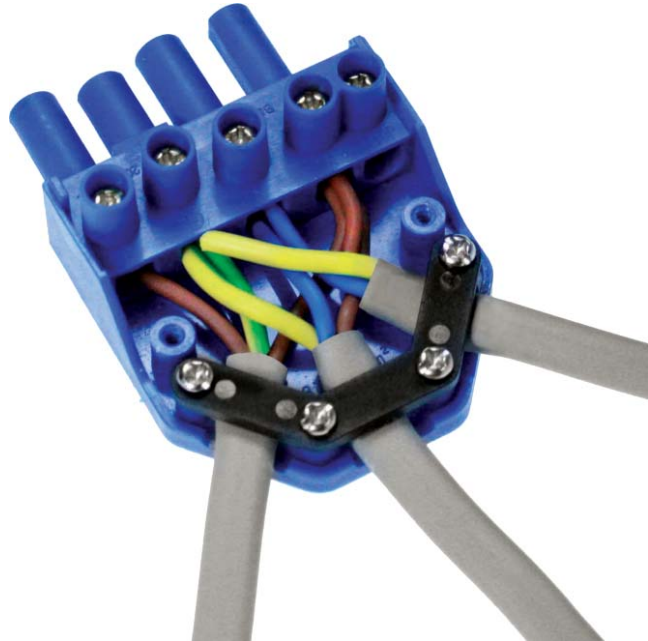

General Information	
Dimensions	Male: 54mm x 30mm x 22mm Female: 69mm x 50mm x 23mm
Material Composition	Cover: Polycarbonate Base: Nylon (PA66) Terminals: HPb59-1 (CU 59%) Silver Plated Terminal Screws: Steel and Yellow Passivated
Voltage	250V~ 50Hz
Current Rating	20A Max
Rated Impulse Voltage	4kV
Terminal Diameter	4.2mm
Terminal Conductor Sizes	CT202F = up to 3 x 2.5mm ² T&E CT202M = up to 1.5mm ² Flex
Termination Layout	Male: L-E-N-Aux Female: L-E-N-Aux- Loop
Cut-out Required	Will pass through a 55mm round hole.
Ingress Protection	IP20
Operational Temperature	5° to +40°C

Standards	
	KEMA-KEUR IEC EN 61535 : 2009 (First Edition) + A1 : 2012

Additional Information	
	<p>Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.</p> <p>Pre-Fabricated wiring systems manufactured to BS 8488 by other manufacturers may not be compatible or safely inter-connectable with this system. Any dangerous compatibility between different manufacturer's installation coupler systems is not automatically prevented by compliance with IEC 61535.</p>

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0