

SPECIFICATION SHEET

Product Code	PRW019

Description	10AX 2 Gang 4 Way Plate Switch

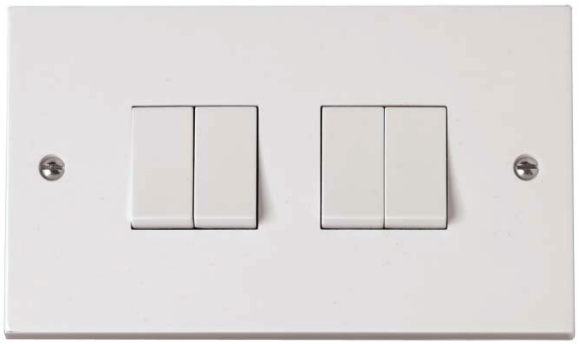

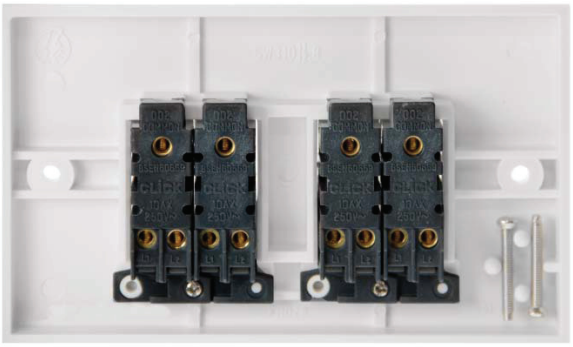

General Information	
Dimensions	146mm x 86mm x 11mm
Material composition	Rear Housing: Nylon Front Plate: Urea Terminals: Brass Earth Strap: Mild Steel Terminal Screws: Steel and Yellow Passivated Silver “on-lay” copper/brass contacts
Back Box Depth	16mm – 47mm
Cable Size	4 x 1.5mm^2 or 2 x 2.5mm^2
Terminal Size	Live: 3.5mm
Load Rating	10AX (Suitable for Inductive loads)
Modular	Yes
Gang	4
2 Way	Yes
Intermediate	No
Warranty	20 Years Domestic

Standards	BS EN 60669

Additional Information	
	Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.9% kill rate across all four types of the strains of bacteria – MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae. Interchangeable with switches in the Mini Grid system.

Errors & Omissions excluded. Specification is subject to change without notice.

V1.0

Scolmore International Limited
1 Scolmore Park, Landsberg, Lichfield Road Industrial Estate, Tamworth, Staffordshire, B79 7XB.

e sales@scolmore.com w www.scolmore.com
t 01827 63454 f 01827 63362