
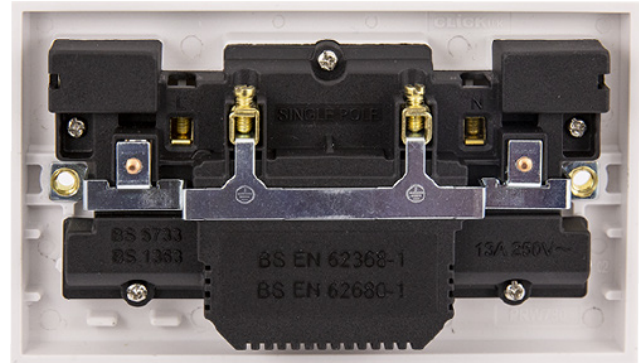


Product Code: PRW780

Description: 13A 2 Gang Switched Socket Outlet With Twin USB (Total 4.2A) Outlets

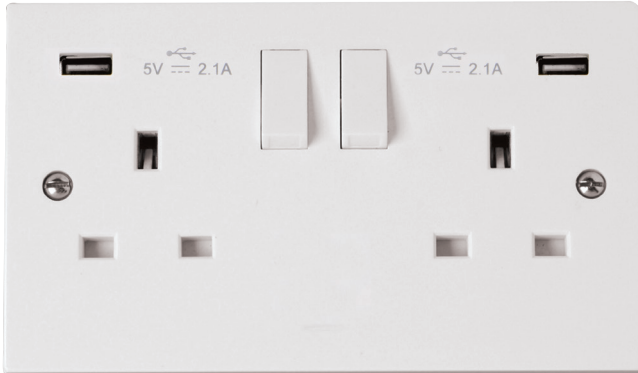

General Information

Plate Dimensions	146mm (W) x 86mm (H) x 11mm (D)	
Plate Design & Finish	Square Edge Polar White	
Materials	Front Plate & Rocker Switch: Urea Terminals: Brass Contacts: Silver "on-lay" Copper / Brass PCB: Mixed Components	Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Internal Busbars: Formed Pressed Brass Earth Strap: Mild Steel
Maximum Voltage	250V~ 50Hz	
Load Rating	13A	
Plate Fixing Centres	120.6mm	
Terminal Size	5mmø	
Terminal Torque	1.2Nm	
Terminal Capacity	3 x 2.5mm ² or 2 x 4mm ²	
Twin Earth Terminals	Yes	
USB Charging Output Total	5V DC, 4.2A	
Number Of USB Outputs	2	
USB Type	USB Type "A"	
USB Standby Current	2mA	
Product Markings	USB 5V 2.1A	
Ingress Protection	IP20	
Back Box Depth	25mm Minimum	
Termination Type	Screw	
Operational Temperature	-5°C to +40°C	
Warranty	20 Years, 1 Year Electronics	
Standards	BS 1363-2: 2016 +A1: 2018 BS EN 62368-1: 2014, BS EN 62680-1-1: 2015	

Additional Information

The USB circuits within this socket outlet are designed to withstand insulation resistance tests at 500V. Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.