

CAT6A 4P 23AWG U/UTP LDPE OUTDOOR LAN CABLE

P/N: DCWC6AO305BK

Description

SHARKRACK CAT6A LSZH cable is designed for high-speed data transmission and maximum reliability. This premium cable is Jelly filled designed for underground use and engineered to support 10 Gigabit Ethernet connections over extended distances, ensuring that your network remains fast and efficient even in demanding environments.


Specifications

- Rated temperature: 75 C
- Reference standard: UL444, ANSI/TIA-568-C.2 ISO/IEC 11801, IEC 61156-5
- Oxygen free copper conductor
- Colour-coded PE insulation
- LDPE jacket

Application

- 100Base-T4
- 100Base-TX
- 100VG-AnyLAN
- 1000Base-T
- 1000Base-TX
- 155Mbps ATM
- 622Mbps ATM

Cable Diagram

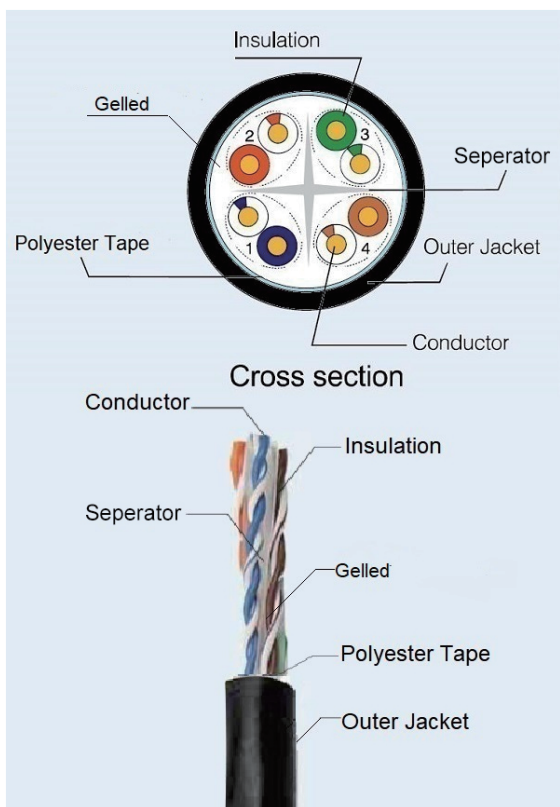

Physical characteristics

Structure	Construction	U/UTP
	Number of Pairs	4 Pairs
Conductor	AWG	23 AWG
	Conductor material	Solid bare copper
	Conductor dimension	0.570±0.005 mm
Insulation	Insulation material	HDPE
	Insulation dimension	1.0±0.05mm
	Number colour (Ring or stripe or pure marking)	1.White/Blue & Blue
		2.White/Orange & Orange
	3.White/Green& Green	
	4.White/Brown & Brown	
Cabling	Twisting lay length	≤ 30mm
	Cabling lay length	≤ 200mm
Seperator 1	Seperator material	Corss PE
Seperator 2	Seperator material	Gelled
Binder	Binder material	Polyester Tape
Shield	Individual shield & material	N/A
	Primary overall shield & material	N/A
	Secondary overall shield & material	N/A
	Shield coverage approx	N/A
	Drain wire	N/A
Outer jacket	Jacket material	LDPE
	Jacket thickness nominal	0.50mm
	Overall nominal dimension	6.40 ±0.30 mm
	Jacket rip cord	Optional
Mechanical characteristics	Operating temperature range	-20 °C ~ +75 °C
	Bulk cable weight approx	46.0kg/km
	Max. recommended pulling tension	110 N
	Min. bend radius (install)	4 x O.D.
	Outer jacket tensile strength	≥ 9.7MPa
	Outer jacket elongation	≥ 350%
	Outer jacket aging condition	100 °C x 48 hrs
	After aging,tensile strength	≥ 75% of Unaging
	After aging,elongation	≥ 75% of Unaging
	Cold bend	No Crack (@ -20°C x 4hrs)
Electrical Characteristics	Nom. mutual capacitance	≤ 5.6 nF/100m (@1kHz)
	Pair to ground capacitance unbalance	≤ 330 pF/100m
	Nominal velocity of propagation	69%
	Max. delay skew	45 ns/100m
	Max. conductor DC resistance	9.38Ω/100m (@ 20 °C)
	Max. conductor resistance unbalance	5% (@ 20 °C) within a pair
	Min. insulation resistance	5000 MΩ.km
	Max. operating voltage - UL	300 V
	Dielectric strength	2,5 kV d.c. for 2 s
	Conductor/conductor	Or 1,0 kV d.c. for 1 min
Propagaton Delay	537.6ns/100m	



