



DKJ-C6AU-03-CWH

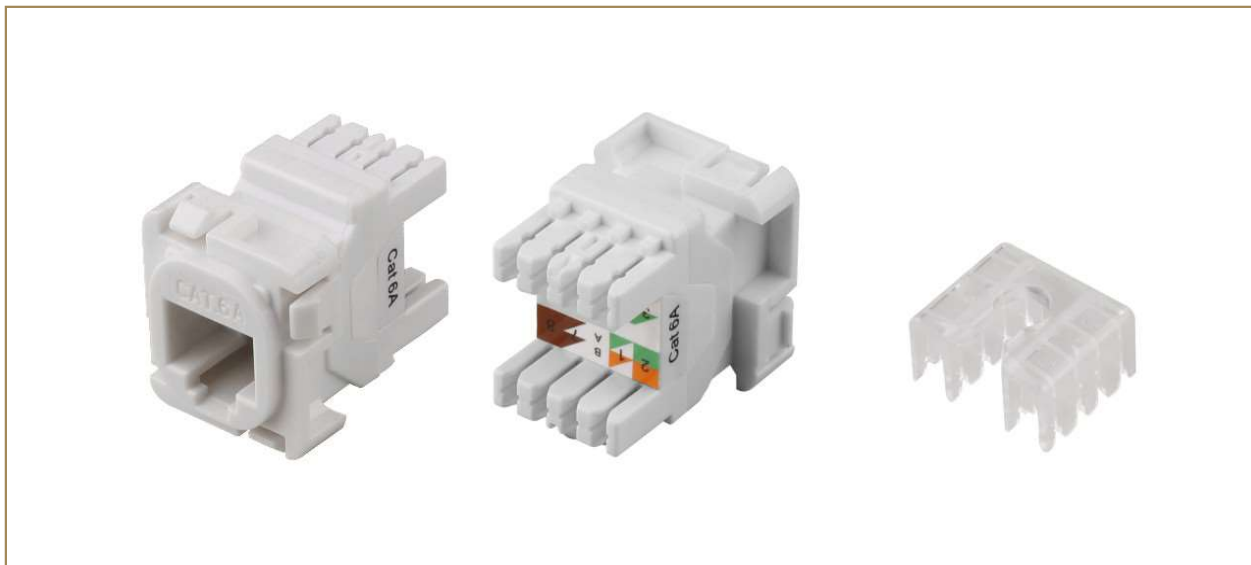

PRODUCT STRUCTURE DIAGRAM

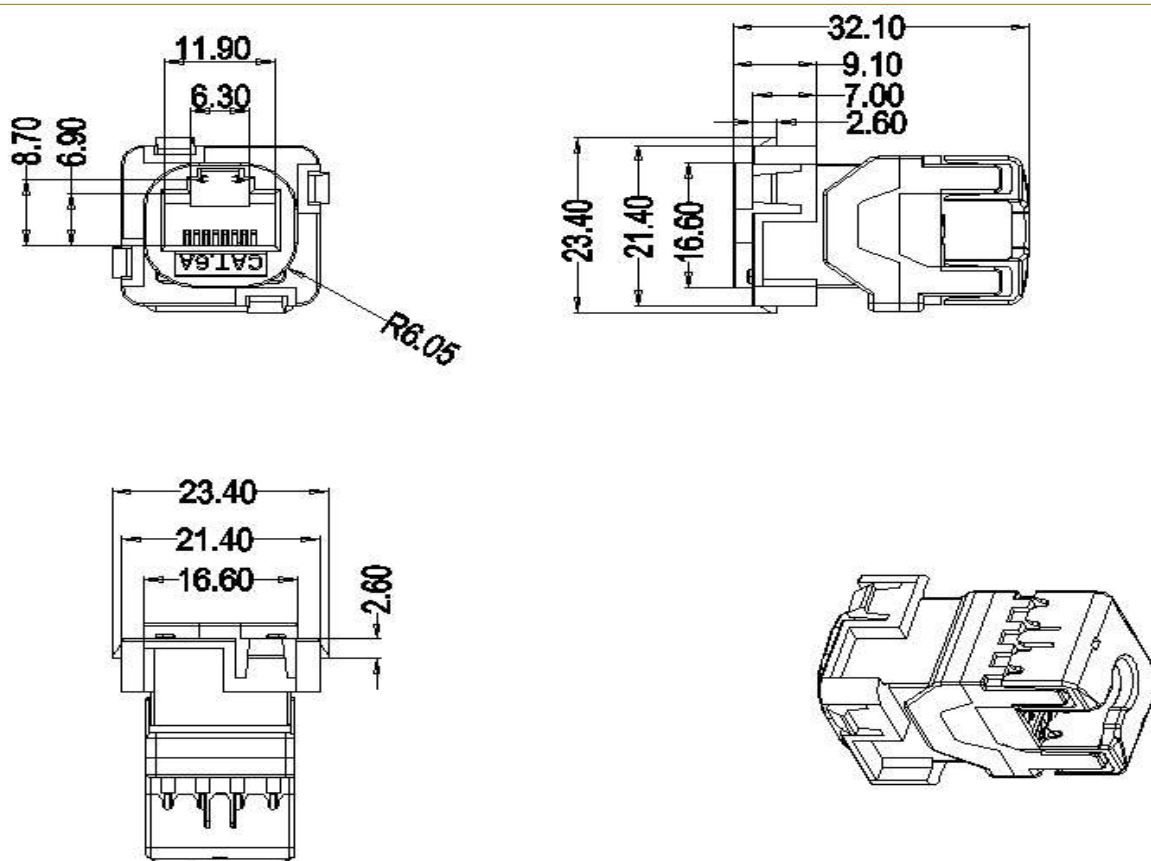

PRODUCT DESCRIPTION

- Meets and exceeds all C6A performance
- Complies with 10 Gigabit Ethernet
- Designed for application systems up to 500MHz
- Designed to suit Australian Style Wall Plates

TECHNICAL CHARACTERISTICS

- Unique exterior design, compact and useful
- Unique PCB circuit board design reduces EMI/RFI interference, low attenuation loss and high return loss
- The outer caps are lock designed, avoiding overbending and falling of wire, providing protection for conductors
- Phosphor bronze IDC clips ensure over 250 terminations
- Matched with 23 AWG wires, phosphor bronze contact with 6μ" to 50μ gold plate, with a durability of 1500 matching recycles

DESCRIPTION	PARAMETER
Contact resistance(max)	20mΩ
Insulation resistance (min)	500MΩ
Return loss (dB)	5.2dB

PACKAGING

PART #	DESCRIPTION	COLOR	INNER BOX	OUTER BOX	CTN SIZE(L*W*H)	WEIGHT
DKJ-C6AU-03-CWH	Cat6A unshielded keystone jacks	White	25PCS	250PCS	53.5*31.3*23.4	4kg

