

RKE Socket

▶▶ **SKB□□-E**

Presentation



10/12 AMPS 300 VOLTS




Characteristics

Type			SKB08-E	SKB14-E
Nominal load	Current	A	12	10
	Voltage	V	300	
Dielectric strength	Between coil and contact	V/S	4000	
	Between contacts	V/S	2500	
Max. tightening torque	Nm		1.0	
Wire size	AWG/mm ²		20-14/0.5-2.5	
Ambient temperature	°C		-40~+85	
Unit weight	g		50	56

Relay,accessories selection table

Socket	Plastic clip	Metal clip	ID tag	Module	DIN rail
SKB08-E	SK36F	SK36M	SK4P	AMD	PFP
SKB14-E					


Dimensions (mm)

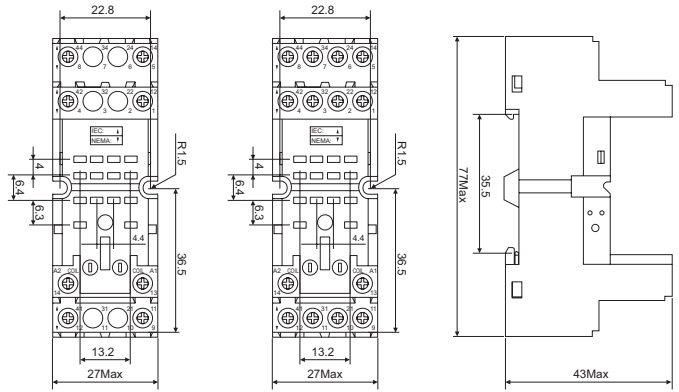

SKB08-E

SKB14-E

Connection Diagrams



SKB08-E

SKB14-E

▶▶ **SKC□□-E**

Presentation



10/12 AMPS 300 VOLTS




Characteristics

Type			SKC08-E	SKC11-E	SKC14-E
Nominal load	Current	A	12	10	10
	Voltage	V	300		
Dielectric strength	Between coil and contact	V/S	4000		
	Between contacts	V/S	2500		
Max. tightening torque	Nm		1.0		
Wire size	AWG/mm ²		20-14/0.5-2.5		
Ambient temperature	°C		-40~+85		
Unit weight	g		50	56	62

Relay,accessories selection table

Socket	Plastic clip	Metal clip	ID tag	Module	DIN rail
SKC08-E					
SKC11-E	SK36F	SK36M	SK4P	AMD	PFP
SKC14-E					

Dimensions (mm)

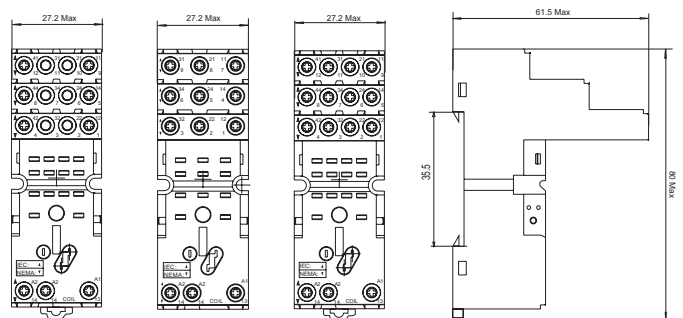


SKC08-E

SKC11-E

SKC14-E

Connection Diagrams

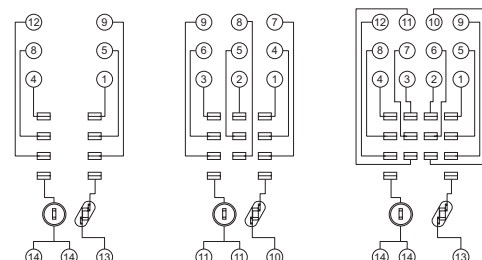

SKC08-E

SKC11-E

SKC14-E