

>>> RKE Miniature General Purpose Relay

RKE Socket

>>> SKC14-S

Presentation



2C 12A; 4C 8A




Characteristics

Nominal load	Current	A	2C 12A; 4C 8A
	Voltage	V	300
Dielectric strength	Between coil and contact	V/S	4000
	Between contacts	V/S	2500
Max. tightening torque	Nm		1.0
Wire size	AWG/mm ²		20-16/0.5-1.5
Ambient temperature	°C		-40~+85
Unit weight	g		70


Relay, accessories selection table

Socket	Plastic clip	ID tag	Module	DIN rail
SKC14-S	SK36F	SR2P	AMD	DIN

Dimensions (mm)

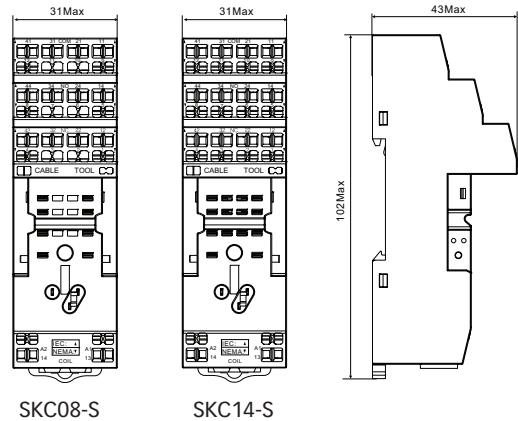

Connection Diagrams



>>> SYF□□A

Presentation



7/10 AMPS 300 VOLTS




Characteristics

Type			SYF08A	SYF11A	SYF14A
Nominal load	Current	A	10	7	7
	Voltage	V	300		
Dielectric strength	V/S		2000		
Max. tightening torque	Nm		1.0		
Wire size	AWG/mm ²		20-14/0.5-2.5		
Ambient temperature	°C		-40~+65		
Unit weight	g		34	47	56

Relay, accessories selection table

Socket	Plastic clip	Metal clip	ID tag	Module	DIN rail
SYF08A	-	-	-	-	-
SYF11A	-	SY36S	-	-	PFP
SYF14A	-	-	-	-	-

Dimensions (mm)

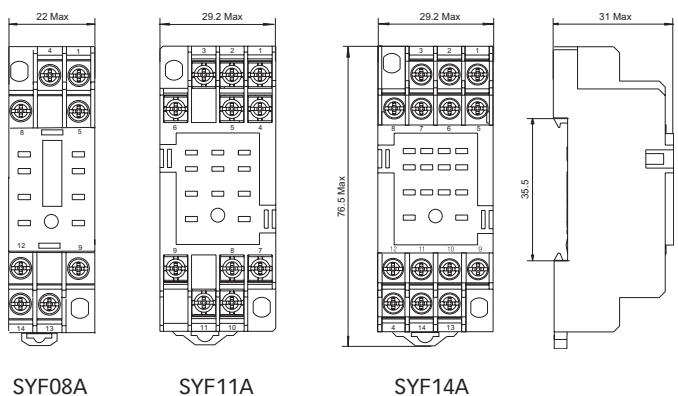

Connection Diagrams

