

>>> RKE Miniature General Purpose Relay

RKE Socket

>>> SYF□□A-E

Presentation



7/10 AMPS 300 VOLTS




Characteristics

Type			SYF08A-E	SYF11A-E	SYF14A-E
Nominal load	Current	A	10	7	7
	Voltage	V	300		
Dielectric strength	V/S		2000		
Max. tightening torque	Nm		1.0		
Wire size	AWG/mm ²		20-14/0.5-2.5		
Ambient temperature	°C		-40~+65		
Unit weight	g		37	56	57


Relay, accessories selection table

Socket	Plastic clip	Metal clip	ID tag	Module	DIN rail
SYF08A-E	-	-	-	-	-
SYF11A-E	-	SY36S	-	-	PFP
SYF14A-E	-	-	-	-	-

Dimensions (mm)

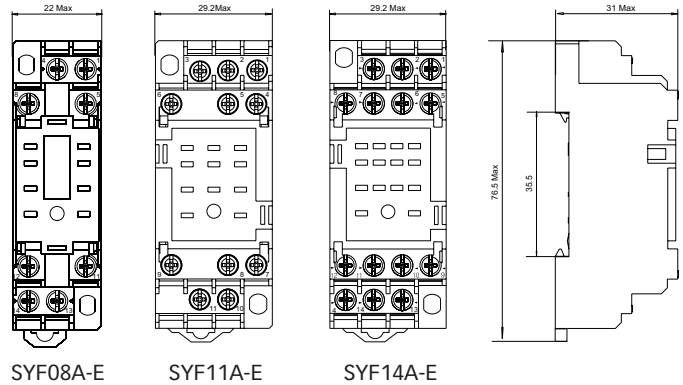

Connection Diagrams

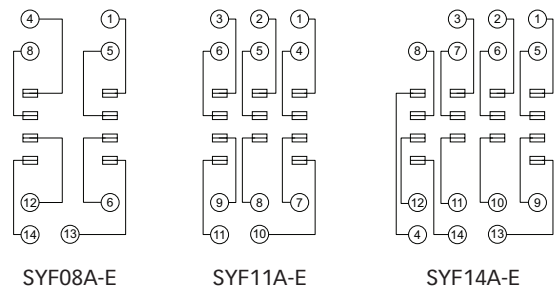

>>> SKF□□-E

Presentation



10/12 AMPS 300 VOLTS




Characteristics

Type			SKF08-E	SKF14-E
Nominal load	Current	A	12	10
	Voltage	V	300	
Dielectric strength	V/S		2500	
Max. tightening torque	Nm		1	
Wire size	AWG/mm ²		20-14/0.5-2.5	
Ambient temperature	°C		-40~+85	
Unit weight	g		35	45

Relay, accessories selection table

Socket	Plastic clip	Metal clip	ID tag	Module	DIN rail
SKF08-E	-	SK36M	SK2P	-	PFP
SKF14-E	-	-	-	AMD	-

Dimensions (mm)

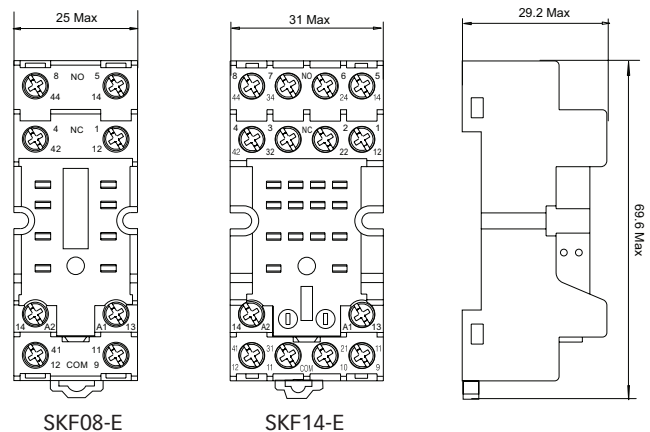

Connection Diagrams

