

RFT Socket

>>> SRU□□-E

Presentation



10/16 AMPS 300 VOLTS




Characteristics

Type			SRU05-E	SRU08-E
Nominal load	Current	A	16	10
	Voltage	V	300	
Dielectric strength	Between coil and contact	V/S	4000	
	Between contacts	V/S	2500	
Max. tightening torque		Nm	1.0	
Wire size		AWG/mm ²	20-14/0.5-2.5	
Ambient temperature		°C	-45~+85	
Unit weight		g	35	43


Relay,accessories selection table

Socket	Plastic clip	Metal clip	ID tag	Module	DIN rail	Bus jumper
SRU05-E	SR20T	-	SR2P	AMD	PFP	SR08B
SRU08-E						

Dimensions (mm)

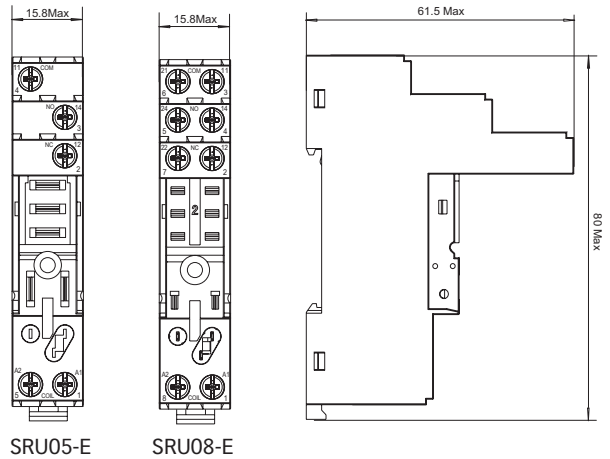

Connection Diagrams



>>> SRT□□-P

Presentation




10/16 AMPS 300 VOLTS



Characteristics

Type			SRT05-P	SRT08-P
Nominal load	Current	A	16	10
	Voltage	V	300	
Dielectric strength	Between coil and contact	V/S	4000	
	Between contacts	V/S	2500	
Ambient temperature		°C	-40~+65	
Unit weight		g	4	

Dimensions (mm)

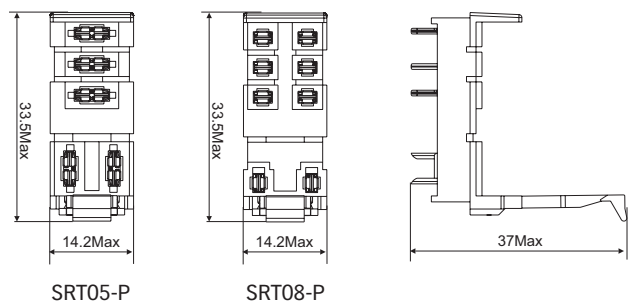

Connection Diagrams

