



- Flexible: Modular structure and 3 sizes enable customer-specific versions
- Lightweight enclosure made from glass fibre reinforced polyester resin (GRP), suitable for shipping industry and offshore

WebCode **8040B**



With the R. STAHL Series 8040 control device system, you can get a clear overview of the control devices. The 3 combinable design sizes and the modular structure offer flexibility. You can choose from one standard version and customised variants.

Technical Data

Explosion Protection

Scope of validity	IECEX
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 06.0025
IECEX gas explosion protection	Ex db eb IIC T6 ... T5 Gb
IECEX dust certificate	IECEX PTB 06.0025
IECEX dust explosion protection	Ex tb IIIC T80 °C / T95 °C Db
ATEX gas certificate	PTB 01 ATEX 1105
ATEX gas explosion protection	⊕ II 2 G Ex db eb IIC T6 ... T5 Gb
ATEX dust certificate	PTB 01 ATEX 1105
ATEX dust explosion protection	⊕ II 2 D Ex tb IIIC T80 °C / T95 °C Db
Certificates	ATEX (PTB), Brazil (ULB), Canada (UL), China (NEPSI), IECEX (PTB), India (PESO), Korea (KGS), Taiwan (ITRI), USA (UL)
Ship approval	DNVGL

Electrical Data

Rated operational voltage AC	550 V
Rated operational current	10 A (T6)

8040/1180X-10L07SA05 Art. No. 130679

Power dissipation	Vertical installation			
	Maximum surface temperature	Maximum permissible integrated power dissipation depending on the ambient temperature		
		-60 °C ≤ Ta ≤ +50 °C	-60 °C ≤ Ta ≤ +60 °C	-60 °C ≤ Ta ≤ +75 °C
	80 °C (T6)	1.1 W ¹⁾	0.8 W ²⁾	-
	95 °C (T5)	1.1 W ¹⁾	1.1 W ¹⁾	0.8 W ²⁾
	100 °C (T4)	1.1 W ¹⁾	1.1 W ¹⁾	0.8 W ²⁾
		¹⁾ 27 K - Max. temperature rise		
		²⁾ 20 K - Max. temperature rise		
		³⁾ 100 °C - Max. permissible service temperature (material limit)		
		Horizontal installation		
	Maximum surface temperature	Maximum permissible integrated power dissipation depending on the ambient temperature		
		-60 °C ≤ Ta ≤ +50 °C	-60 °C ≤ Ta ≤ +60 °C	-60 °C ≤ Ta ≤ +75 °C
	80 °C (T6)	1.1 W ¹⁾	-	-
	95 °C (T5)	1.1 W ¹⁾	1.1 W ¹⁾	-
	100 °C (T4)	1.1 W ¹⁾	1.1 W ¹⁾	0.8 W ²⁾
		¹⁾ 30 K - Max. temperature rise		
		²⁾ 23 K - Max. temperature rise		
		³⁾ 100 °C - Max. permissible service temperature (material limit)		

Ambient Conditions

Ambient temperature	-60 °C ... +40 °C (T6) -60 °C ... +55 °C (T5)
---------------------	--

Mechanical Data

Degree of protection (IP)	IP66
Degree of protection note	acc. to IEC/EN 60529
Enclosure material	Polyester resin, Glass fibre reinforced
Silicone-free	No
AWG clamping range	AWG14
Connection cross-section max.	2,5 mm ²
Cover fixing type	With captive screws, M4 stainless steel screws
Seal	Silicone, foamed
Weight	0.4 kg
Weight	0.88 lb

8040/1180X-10L07SA05 Art. No. 130679

Mounting / installation	Cable entry
	Standard: 1 x M25 x 1.5; cable glands 8161; side below (D); directly mounted into enclosure wall
	Special: In side C (top) and/or D (bottom); 1 x M20 x 1.5; 1 x M25 x 1.5 Metal cable glands are possible; Mounting of metal cable glands in metal flange or via metal adapter plate
	Flange
Standard: without flange	
Special: with flange made of polyester resin or brass, can be mounted to sides C and D	


Components

Installation position middle	EM-STOP mushroom stay-put button Red – (rotating arrow)
Built-in element middle	Contact element NC/NO
Number of poles on centre built-in element	2
Flange and plates	Without flange, without plates
Cable glands and entries	1 x M25 Ø 7 to 17 mm
Entry type	Standard 8161, moulded material

Technical Drawings – Subject to Alterations



Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

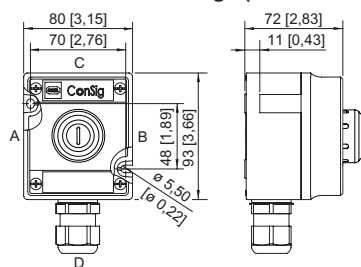

ConSig 8040/11

Accessories

Mushroom stay-put button EM-STOP BG010



Ø 39 mm
Yellow/red
Designation plate: With yellow backing plate
Silicone-free: No

Art. No.

223698

Spare Parts

Label holder




Art. No.

Control Devices

Control device system ConSig 8040 series




STAHL

8040/1180X-10L07SA05 Art. No. 130679

	Size 1, without insert disc, 1-line label for actuators Ø 39	223566
	Size 2, without insert disc, 1- or 2-line label for actuators Ø 39	223567
	Size 3, without insert disc, 1-, 2- or 3-line label for actuators Ø 39	223568



Locking devices

Art. No.

	8602C3-752 for actuated mushroom stay-put button BG010, BG012	244869
	8602C3-756 for actuated mushroom stay-put button BG010, BG012	244873
	8602C3-758 for not actuated mushroom stay-put button BG010, BG012	244874


Protective collar

Art. No.

	8602C3-751 plastic/yellow for mushroom stay-put button with key lock/mushroom stay-put button Ø 39 BG006, BG009, BG010, BG012	257708
	8602C3-751 plastic/red for mushroom stay-put button with key lock/mushroom stay-put button Ø 39 BG006, BG009, BG010, BG012	257707

Special key

Art. No.

	for tightening plastic locking nut	169101
--	------------------------------------	--------

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.