


8118/122-331-GB Art. No. 133117



- Compact, impact-resistant enclosure, also available in versions with integrated metal bracket for optimised installation of cable glands
- Customer-specific equipping with terminals, cable glands and miniature fuses
- IP66 degree of protection

WebCode **8118B**

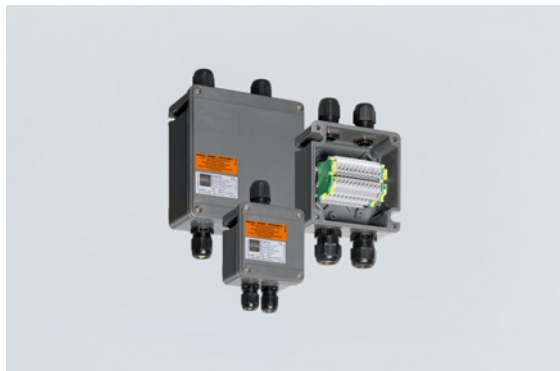

R. STAHL Series 8118 terminal boxes are equipped, in accordance with customer specifications, with various series terminals and cable glands made from plastic or metal, if required also with miniature fuses. They are available in 3 design sizes and are made from glass fibre reinforced polyester resin.

Technical Data

Explosion Protection

Scope of validity	IECEX European Union (ATEX)
Application range (zones)	1 2 21 22
IECEX gas certificate	IECEX PTB 06.0026
IECEX gas explosion protection	Ex eb IIC T5 ... T4 Gb
IECEX dust certificate	IECEX PTB 06.0026
IECEX dust explosion protection	Ex tb IIIC T95 °C / T130 °C Db
ATEX gas certificate	PTB 99 ATEX 3103
ATEX gas explosion protection	II 2 G Ex eb IIC T5 ... T4 Gb
ATEX dust certificate	PTB 99 ATEX 3103
ATEX dust explosion protection	II 2 D Ex tb IIIC T95 °C / T130 °C Db
Certificates	ATEX (PTB), Brazil (ULB), China (NEPSI), IECEX (PTB), India (PESO), Korea (KTL)
Explosion protection note	For product label, see scope of validity.

Electrical Data

Max. number of conductors for conductor cross-section 1.5 mm ²	at 3 A: 26 ^{*)} at 6 A: 26 ^{*)} at 10 A: 26 ^{*)} at 16 A: 6 ^{*)}
Max. number of conductors for conductor cross-section 2.5 mm ²	at 3 A: any at 6 A: 26 ^{*)} at 10 A: 26 ^{*)} at 16 A: 14 ^{*)} at 20 A: 6 ^{*)}

Installation Equipment

Ex e terminal box with earth plate

STAHL

8118/122-331-GB Art. No. 133117

Electrical Data

Max. number of conductors for conductor cross-section 4 mm ²	at 3 A: any at 6 A: any at 10 A: 22 ^{*)} at 16 A: 22 ^{*)} at 20 A: 22 ^{*)} at 25 A: 8 ^{*)}
Max. number of conductors for conductor cross-section 6 mm ²	at 3 A: any at 6 A: any at 10 A: any at 16 A: 20 ^{*)} at 20 A: 20 ^{*)} at 25 A: 20 ^{*)} at 35 A: 4 ^{*)}
Max. number of conductors note	Each inserted conductor and each internal connection conductor counts as a conductor. Jumpers and protective conductors do not count. ^{*)} When using this values, simultaneity factors or load factors must be taken into account according to IEC 61439. A mixed assembly with electrical circuits of different cross sections and currents is possible with proportional utilisation of the different tables of values.

Ambient Conditions

Ambient temperature	-50 °C ... +55 °C (T5) -50 °C ... +55 °C (T4)
Ambient temperature	-50°F ... +131°F (T5) -50°F ... +131°F (T4)

Mechanical Data

IP degree of protection (IEC 60529)	IP66
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Dark grey
Flammability according to	IEC/EN 60695 UL 94 ASTM D635
Silicone-free	No
Cover	Screw-on cover
Cover fixing type	M4 stainless steel screws, With captive screws
Width	115 mm
Width, inches	4.53 in
Height	115 mm
Height, inches	4.53 in
Depth	64 mm
Depth, inches	2.52 in
Packaging unit	1
Weight	0.72 kg
Weight	1.59 lb

Mounting / Installation

Tightening torque of cover screw 1	1.4 Nm
Cover screw 1 tightening torque lbf in	12.4 lbf in

Installation Equipment

Ex e terminal box with earth plate


STAHL

8118/122-331-GB Art. No. 133117

Components




Entry 1	2 x 8290/3-M20
Entry 1 type	Polyamide stopping plug
Entry 1	M20 x 1.5
Metal entry possible 1	Yes
Entry 2	2 x Through hole without cable entry
Entry 2	Ø 20 mm
Metal entry possible 2	Yes
Entries installation options/side	Size 2: 4x M20 (A+B+C+D)
Terminal rail	35 x 50 mm (1x)
Terminal rail	1,38 x 1,97 " (1x)
Type of terminals 1	6 x Weidmüller WDU 2.5 2-conductor, 2.5 mm², beige
Type of terminals PE 1	2 x Weidmüller WPE 4 2-conductor, 4 mm², green-yellow
	For connection cross-sections, see the manufacturer's data sheet

Technical Drawings – Subject to Alterations



"—" = marking installation possibilities

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations



Length L
 protrusion length for cable glands, Series 8161
 in case of M20: 25 ... 31 [0.98 ... 1.22]
 in case of M25: 27 ... 33 [1.06 ... 1.3]
 in case of M32: 32 ... 39 [1.26 ... 1.54]
 protrusion length for cable glands with strain relief,
 Series HSK-K-MZ
 in case of M25: 41 [1.61]






8118/2.
enclosure size 2

Accessories

Brass plate with thread

		Art. No.
	8118 size 1, plate 37 x 30 mm [1.46 x 1.18"] 1 x M20 x 1.5 with M4 PE connection (left) for installation in enclosure size 1, size 2 and size 3	168913
	8118 size 1, plate 37 x 30 mm [1.46 x 1.18"] 1 x M20 x 1.5 with M4 PE connection (right) for installation in enclosure size 1, size 2 and size 3	168914
	8118 size 2, plate 56 x 40 mm [2.2 x 1.57"] 2 x M20 x 1.5 with M4 PE connection (right) for installation in enclosure size 2 and size 3	244072

8118/122-331-GB Art. No. 133117

	8118 size 2, plate 56 x 40 mm [2.2 x 1.57"] 1 x M25 x 1.5 with M4 PE connection (left) for installation in enclosure size 2 and size 3	211341
	8118 size 3, plate 74 x 40 mm [2.91 x 1.57"] 2 x M20 x 1.5 with M4 PE connection (centre) for installation in enclosure size 2 and size 3	168915
	8118 size 3/B, plate 74 x 40 mm [2.91 x 1.57"] 2 x M20 x 1.5 with M4 PE connection (centre) for installation in enclosure size 2 and size 3	244075
	8118 size 3, plate 74 x 40 mm [2.91 x 1.57"] 1 x M20 x 1.5 + 1 x M10 with M4 PE connection (centre) for installation in enclosure size 2 and size 3	211342
	8118 size 3, plate 74 x 40 mm [2.91 x 1.57"] 2 x M25 x 1.5 with M4 PE connection (centre) for installation in enclosure size 2 and size 3	168916
	8118 size 3, plate 74 x 40 mm [2.91 x 1.57"] 1 x M25 x 1.5 + 1 x M10 with M4 PE connection (centre) for installation in enclosure size 2 and size 3	211343

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.